

## DESCRIPTION


The Z-FV200CA-AS Amplifier Changeover Panel is used to automatically changeover FV-200 series fault duty amplifier to working standby amplifier. Can handle up to 6 FV-200 series amplifier.

## SPECIFICATIONS


Power Source	Usable power supply unit : FV-200PS DC 24 V (operating range : 21.6 – 26.4 V), M3 screw terminal
Current Consumption	240 mA
No. of Input Channel	6 Duty Amplifier, 1 Standby Amplifier
No. of Output Channel	6 Output
Failure Detection	Fault Buzzer with Buzzer CTRL switch
Display	Power indicator (Green), Changeover indicator (Orange), Fault indicator (Red) Buzzer CTRL indicator (Red)
Operating Temperature	0°C to +40°C
Operating Humidity	Under 90% RH (no condensation)
Finish	Front Panel : Aluminum, Black, Paint
Dimensions	482 (W) X 44 (H) X 343.2 (D) in mm
Weight	2.6 kg
Accessory	Removable terminal plug (2pins)...3, Removable terminal plug (8pins)...4, Instruction Manual...1

## APPEARANCE


### Rear View

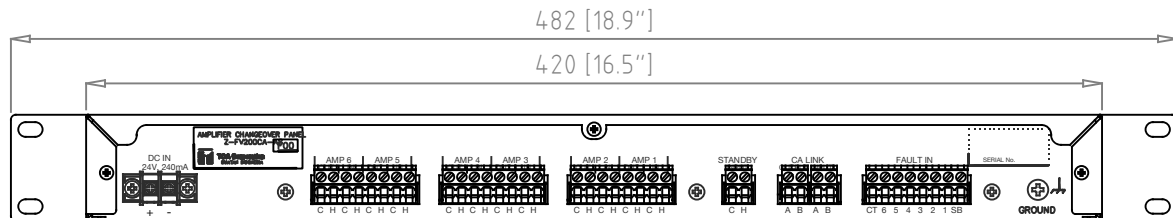

### Front View

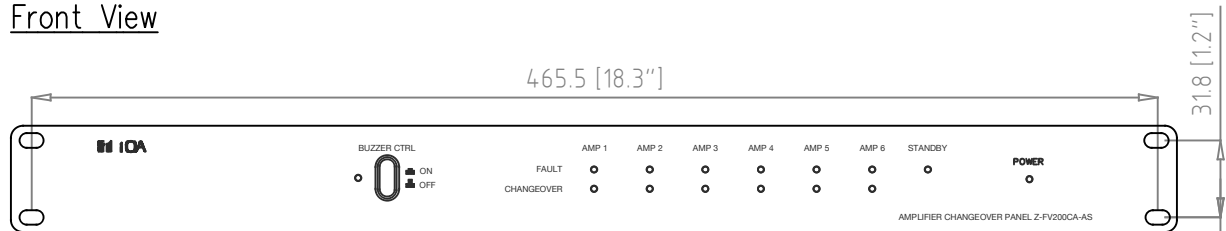

### Right View

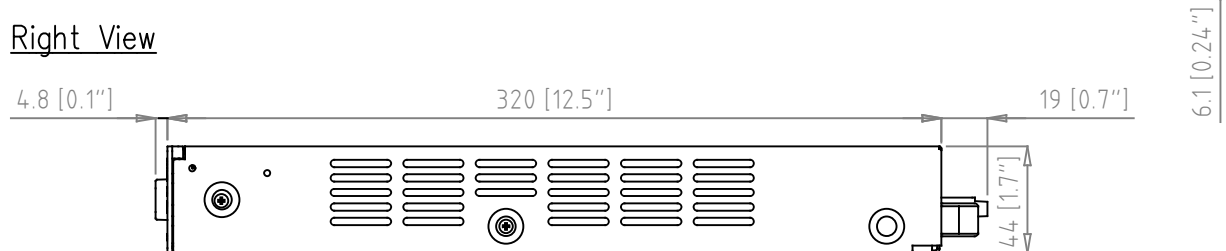

UNIT : mm SCALE : 1/3