

DESCRIPTION


The ZA-3212DM-AS is a high cost-performance mixer power amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

SPECIFICATIONS

* 0 dB = 1 V

| | |
|-----------------------------|---|
| Power Source | 100 – 240 V AC ~ 50/60Hz |
| Power Consumption (EN60065) | 44 W (AC operation at 1/8 maximum output without clip) |
| Rated Output | 120 W |
| Input | MIC1 :1mV (-60dB*), 600Ω, balanced, phone jack, selectable to RJ45 MIC2 - 3 :1mV (-60dB*), 600Ω, balanced, phone jack MIC4 :1mV (-60dB*), 600Ω, balanced, phone jack, selectable to AUX1 AUX1 :100mV (-20dB*), 10kΩ, unbalanced, RCA pin jack, selectable to MIC4 AUX2 :100mV (-20dB*), 10kΩ, unbalanced, RCA pin jack MP3 :LED Display, Support USB, SD/MMC Card (up to 32GB), Bluetooth, Radio FM, Record |
| Output | Speaker out: Speaker output in screw type terminal Direct Line (selectable): 83Ω (100V) or 4Ω Rec out: 0dB*, 600Ω, unbalanced, RCA pin jack |
| Phantom Power | DC +21 V (MIC 1) |
| S/N Ratio | Over 60 dB |
| Total Harmonic Distortion | Under 1% at 1kHz, 1/3 rated power |
| Muting | MIC 1: Mutes other input signal by 0 – 30dB attenuation |
| Frequency Response | 50 – 20,000 Hz |
| Tone Control | Bass: ±10 dB at 100 Hz Treble: ±10 dB at 10 kHz |
| Indicator | Power, Signal, Peak, Protect |
| Operating Temperature | 0° to +40°C |
| Ventilation | Natural Air Cooling |
| Finish | Panel: ABS resin, black Case: Steel plate, black |
| Dimensions | 420 (W) X 100.9 (H) X 357 (D) mm (16.54" X 3.97" X 14.06") |
| Weight | 5 kg (11.02 lb) |

APPEARANCE

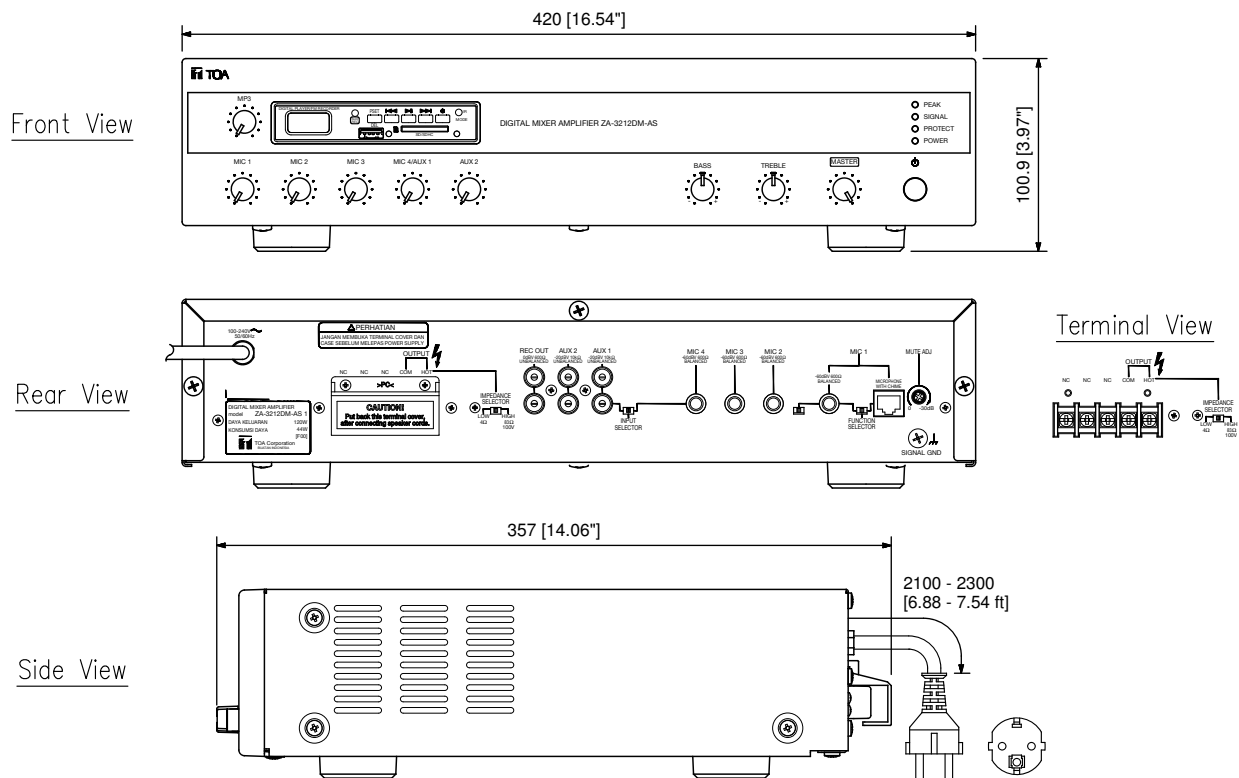

UNIT : mm SCALE : 1/4