


### DESCRIPTION

The SR-S4L is a two-way line array speaker ideal for long distance sound transmission and configures a line array by arranging speaker elements vertically close to each other. It can be converted into the bi-amplifier drive system by changing the internal connection. It can be used for high-impedance applications with the installation of the optional MT-S0601 Matching transformer.

### SPECIFICATIONS

|                         |  |
|-------------------------|--|
| Enclosure               | Bass-reflex type   |
| Power Handling Capacity | Continuous program: 600 W (single-amp mode)<br>Low 240 W, High 240 W (bi-amp mode)   |
| Rated Impedance         | 8 Ω (single-amp mode)<br>Low 8 Ω, High 8 Ω (bi-amp mode)   |
| Sensitivity             | 94 dB (1 W, 1 m)   |
| Frequency Response      | 70 Hz – 20 kHz (when recommended parameters are applied by the optional DP-SP3)  |
| Crossover Frequency     | 3.5 kHz  |
| Directivity Angle       | Horizontal: 90°, Vertical: 0° (within the range of speaker height)   |
| Speaker Component       | Low frequency: 10 cm cone-type × 8<br>High frequency: 2.5 cm balanced dome-type × 24   |
| Input Connector         | M4 screw terminal, distance between barriers: 10 mm and Neutrik NL4MPXX × 2  |
| Finish                  | Enclosure: MDF, white, paint<br>Front grille: Punched steel plate, white, acrylic paint  |
| Dimensions              | 160 (W) × 895 (H) × 255 (D) mm   |
| Weight                  | 16 kg  |
| Accessory               | Bi-amplifier drive rating label ∙1, Bi-amplifier drive input indication label ∙1   |
| Option                  | Matching transformer: MT-S0601, Extension plate: SR-EP4,<br>Flying bracket: SR-FB4, Wall mounting bracket: SR-WB4,<br>Wall tilt bracket: SR-TB4, Stand adapter: SR-SA4,<br>Protection pad: SR-PP4, Floor stand: SR-FS4,<br>Digital speaker processor: DP-SP3 |

### APPEARANCE

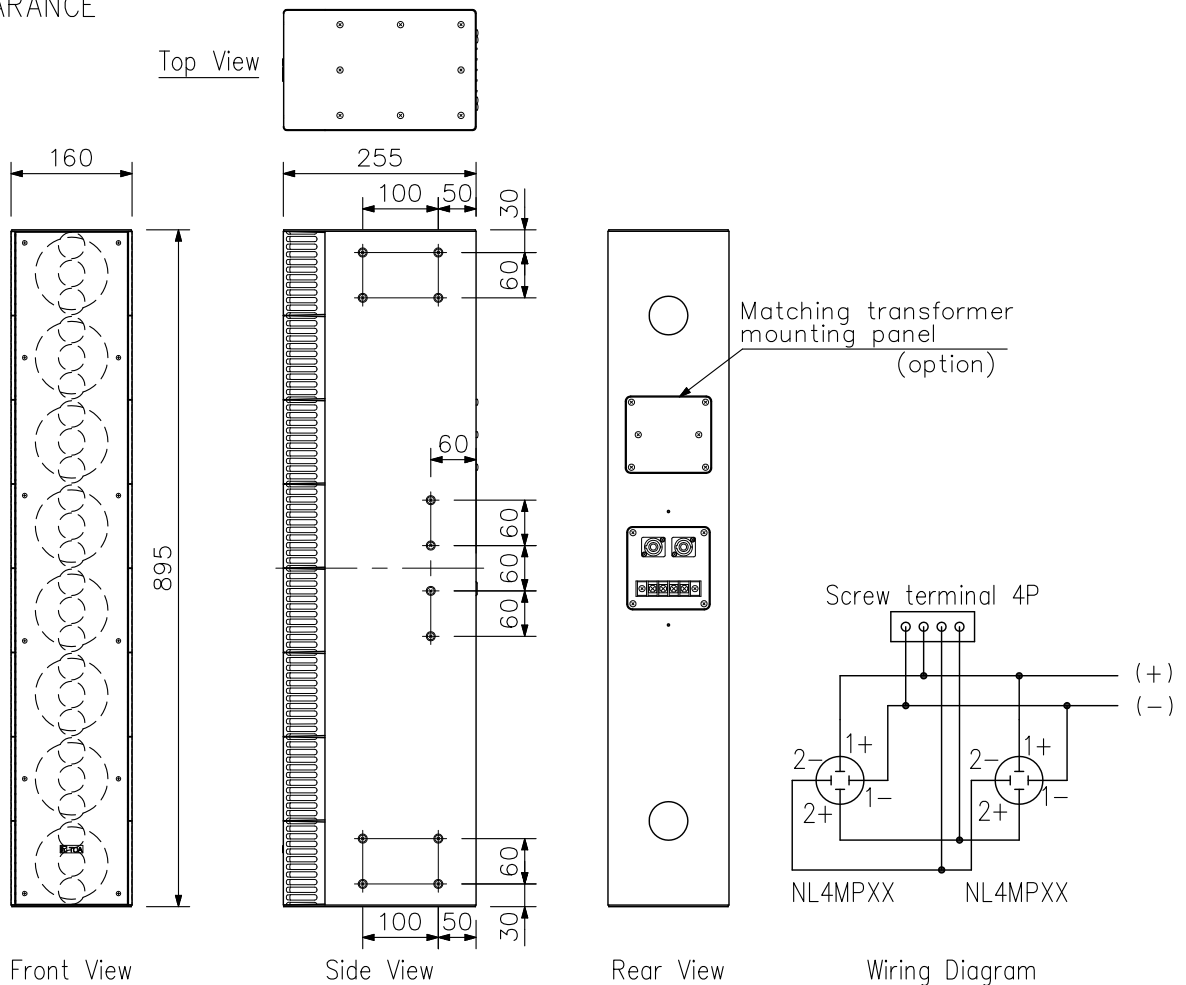

UNIT:mm SCALE:1/10