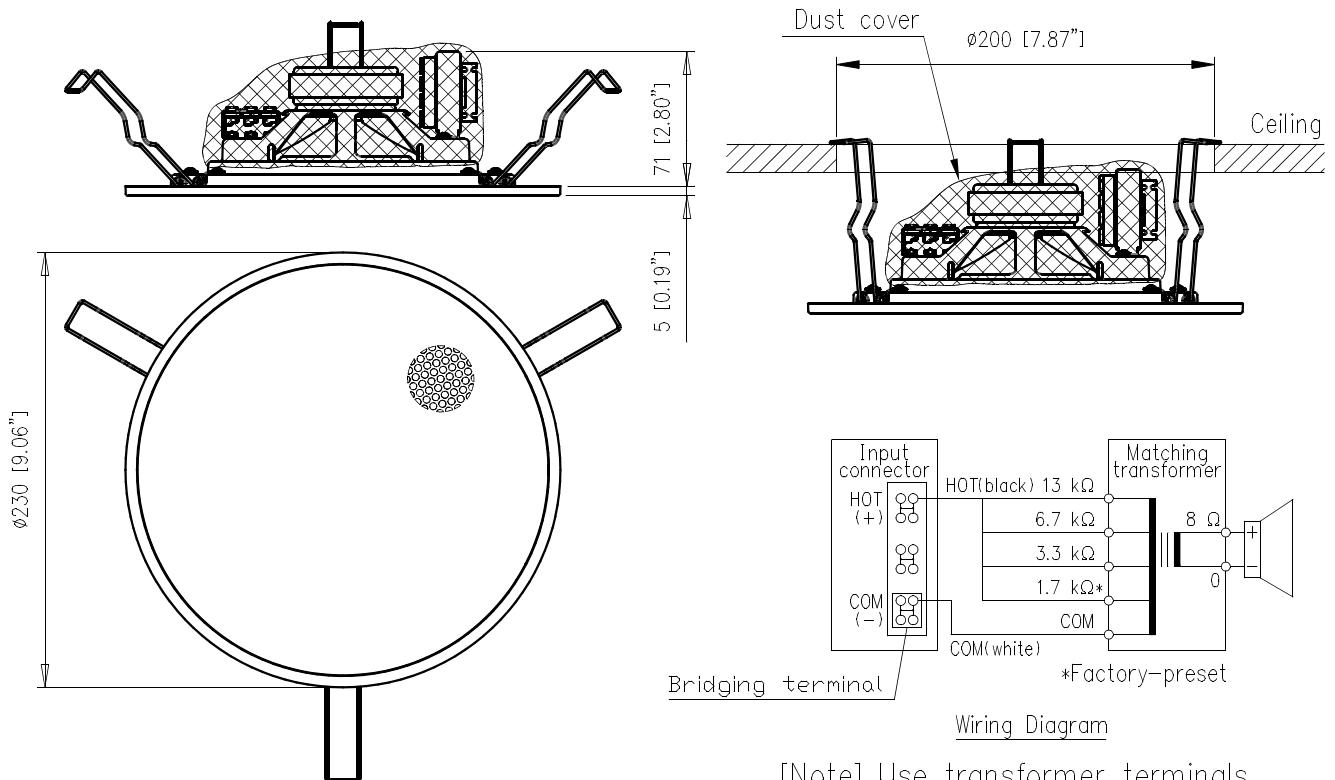


DESCRIPTION

The ZS-2360-AS Ceiling Mount Speaker is of all metallic construction and ideal for use in a voice alarm system or BGM system. It features a spring clamp mechanism for easy mounting to the ceiling. The input impedance can be easily changed by changing the tap position of the transformer. The push-in type input terminal block makes cable connection easy and allow bridge wiring.

SPECIFICATIONS

| | |
|---------------------------|---|
| Rated Noise Power | 6 W (100 V Line), 3 W (70 V Line) |
| Rated Impedance | 100 V line: 1.7 k Ω (6 W), 3.3 k Ω (3 W), 6.7 k Ω (1.5 W), 13 k Ω (0.8 W) 70 V line: 1.7 k Ω (3 W), 3.3 k Ω (1.5 W), 6.7 k Ω (0.8 W), 13 k Ω (0.4 W) |
| Sensitivity | 94 dB (1 W, 1 m) (330 Hz - 3.3 kHz, pink noise) |
| Frequency Response | 45 Hz - 20 kHz (pink noise -20 dB) |
| Speaker Component | 16 cm (6") cone-type |
| Dimension for Fixing Hole | Mounting hole: $\phi 200 \pm 3$ mm [7.87" \pm 0.12"] Ceiling Thickness: 5 - 25 mm [0.2" - 0.98"] |
| Speaker Mounting Method | Suspension spring |
| Applicable Cable | Solid wire: 0.5 - 3 mm ² (AWG20-12) |
| Connection | Push wire connection (Bridging terminal 2-branch type) |
| Finish | Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint |
| Dimensions | $\phi 230 \times 5$ (exposed section) + 71 (D) mm ($\phi 9.06" \times 0.19" + 2.80"$) |
| Weight | 900 g (1.98 lb) |

APPEARANCE


[Note] Use transformer terminals when changing input impedance.

UNIT : mm [in] SCALE : 1/4