


DESCRIPTION

The RS-142 is a switch board designed for use with the N-8000RS or N-8010RS 2-Core Shielded Substation Interface Unit.  
 You can make desired switch panels to meet intended purposes by combining the RS-142 with the separately prepared operation panel having 2 switches to be used as call buttons.  
 Also, it can be used in connection with the RS-141 Ip Intercom Option Handset.

SPECIFICATIONS

Call Button Wiring	4 cables (for 2 momentary switches)
Wiring	Two-core shielded cable
Transmission Range	0.5 km (546 yd)/ $\phi$ 0.5 mm (AWG24) 0.8 km (874 yd)/ $\phi$ 0.65 mm (AWG22) 1.3 km (1421 yd)/ $\phi$ 0.9 mm (AWG19)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Weight	30 g (0.07 lb)

APPEARANCE

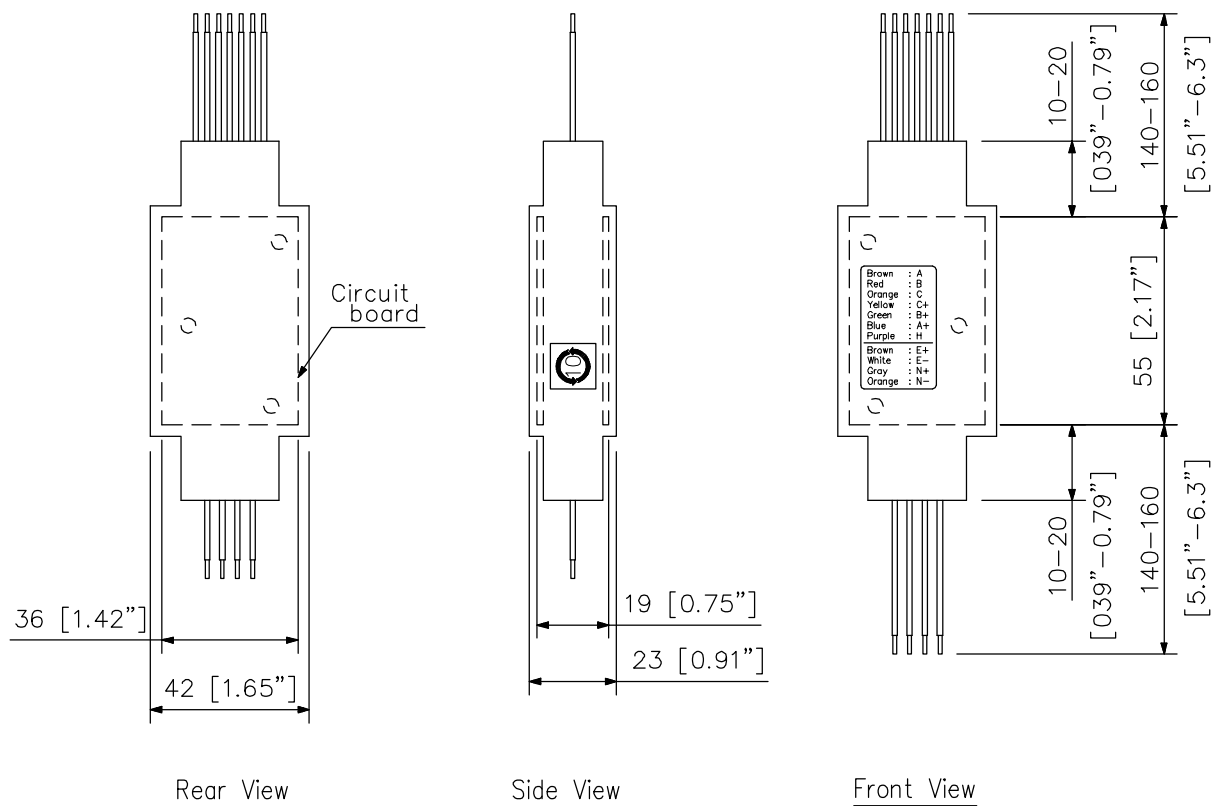

UNIT:mm SCALE:1/2