

DESCRIPTION


The TOA ZA-D6500-AS 1 is 4-Channel Digital Power Amplifier features high power output. It delivers maximum 1000 W x 4 channels (4 Ω Outputs). Add additional, channel 1 and 2 or channel 3 and 4 can be a Bridge connection, allowing it to be used as a monaural amplifier maximum 1300 W (8 Ω Output). This unit can be install to Rack System using EIA Standard (2U size).

SPECIFICATIONS

* 0 dB = 1 V

Power Source	220 V AC, 50/60 Hz
Amplification System	Class D
Power Consumption	IEC 62368-1 : 544 W
Input	CH 1 - 4 : 20 k Ω (balanced) / 10 k Ω (unbalanced), 0.775 V / 1.4 V (selectable), XLR-F connector
Output	LINK 1 - 4 : XLR-M connector OUTPUT 1 - 4 (Max.) : 4 channels : 650 W x 4 (8 Ω), 1000 W x 4 (4 Ω) 2 channels (BRIDGE) : 1300 W x 2 (8 Ω) NL4 speakON connector
Frequency Response	20 - 20,000 Hz, ± 3 dB
Total Harmonic Distortion	0.3 % or less (1 kHz, Rated output)
S/N Ratio	95 dB or more
Indicator	Active, Signal, Clip, Protect
Operating Temperature	0 $^{\circ}$ C to +35 $^{\circ}$ C
Operating Humidity	90% RH or less (no condensation)
Ventilation	Fan Cooling
Finish	Front Panel : Steel Plate, Black, Paint Case : Steel Plate, Black, Paint
Dimensions	482 (W) x 107 (H) x 435 (D) mm (18.98" x 4.21" x 17.13")
Weight	10.2 kg

APPEARANCE

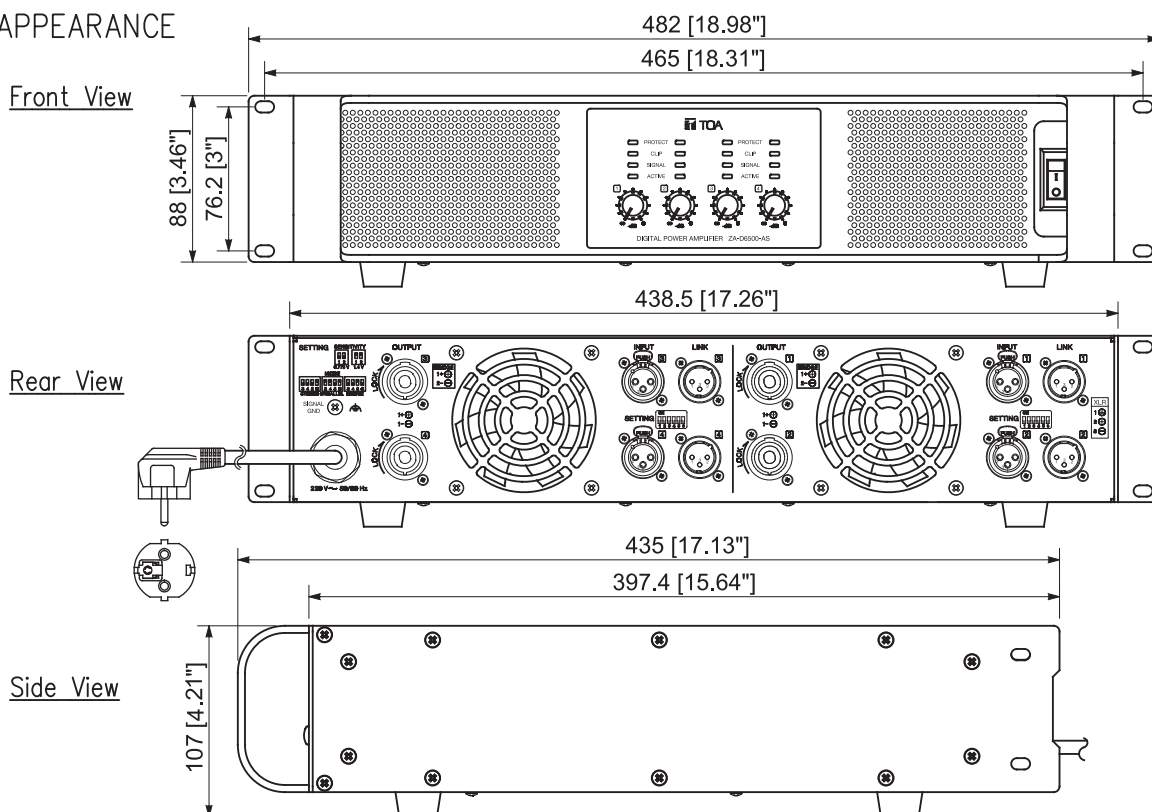

UNIT:mm SCALE:1/4