


DESCRIPTION

The Z-2322C ceiling-mounted speaker covers an extremely wide area and can be used for 70V & 100V line applications. Well-balanced sound can be heard uniformly at any location.

SPECIFICATIONS

| | |
|-------------------------|---|
| Enclosure | Bass reflex type |
| Rated Input | 30 W (High Impedance) |
| Power Handling Capacity | Continuous pink noise: 60 W (8 Ω) Continuous program: 120 W (8 Ω) |
| Impedance | 100 V line: 330 Ω (30 W), 1 kΩ (10 W), 3.3 kΩ (3 W), 10 kΩ (1 W) 70 V line: 170 Ω (30 W), 330 Ω (15 W), 1 kΩ (5 W), 3.3 kΩ (1.5 W), 10 kΩ (0.5 W) 8 Ω |
| Sensitivity | 90 dB (1 W, 1 m) |
| Frequency Response | 70 Hz - 20 kHz (-10 dB), 50 Hz - 20 kHz (-20 dB) at installation in 1/2 free sound field (Measured by installing the unit in the center of a ceiling.) |
| Speaker Component | 12 cm cone-type |
| Mounting Hole | ∅200 mm (Maximum ceiling thickness: 37 mm) |
| Input Terminal | Removable locking connector with screw-down terminals (2 input terminals and 2 bridge terminals) |
| Usable Cable | Solid copper wire: ∅0.5 - ∅1.6 mm (equivalent to AWG No. 24 - 14) Stranded copper wire: 0.2 - 2.5 mm ² (equivalent to AWG No. 24 - 14) |
| Finish | Enclosure: Steel plate, plating Baffle: Fire-resistant ABS resin (resin material grade: UL-94 V-0), black Rim: Fire-resistant ABS resin (resin material grade: UL-94 V-0), white, paint Punched net: Steel plate, white, paint |
| Dimensions | ∅230 × 200 (D) mm |
| Weight | 3.7 kg (including mounting accessories) |
| Accessory | Panel1, Ceiling reinforcement ring1, Safety wire1, Paper pattern ...1 |

APPEARANCE

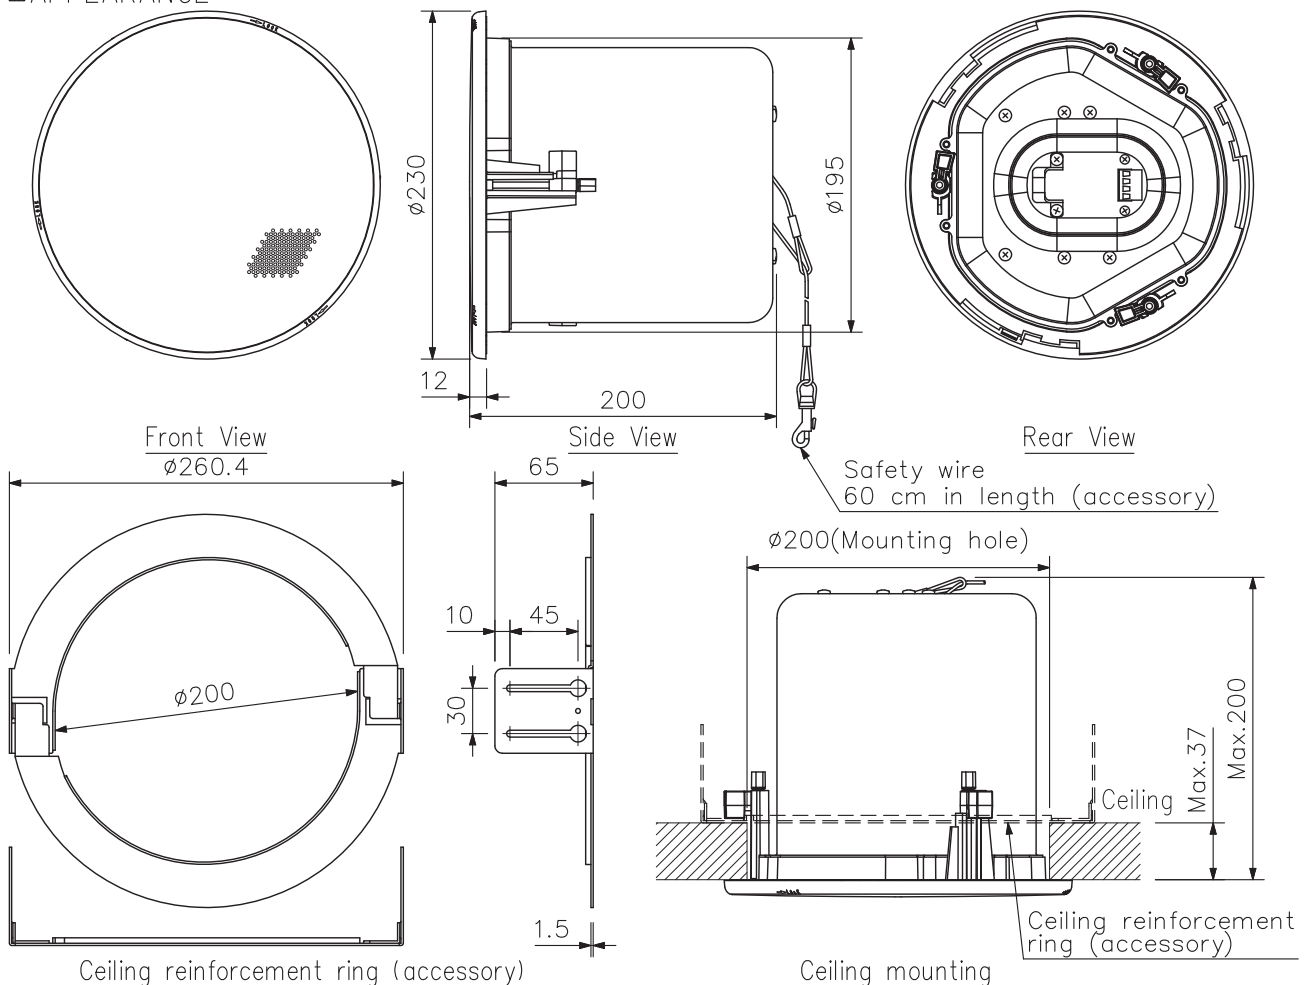

UNIT: mm SCALE: 1/5