

DESCRIPTION

The D-936R is a 4 stereo input module designed for use with the D-901 Digital Mixer, etc. It is equipped with standard RCA pin jacks. The D-936R features two stereo transmission modes:
 1) Selection of one of the four stereo inputs for transmission to the D-901.
 2) Mixing of all four stereo inputs, transmitting the mixed signal to the D-901 through left/right channel outputs.
 Mode settings and stereo selection are performed at the main frame such as the D-901.

SPECIFICATIONS


* 0 dB = 0.775 V

| | |
|---------------------------|--|
| Input | 1) When the module is attached to the D-901 (option) or D-2008SP (option) or DP-K1 (option); stereo × 4 inputs (Selection of 1 stereo or mixing or all 4 stereo inputs) -10 dB*, 10 kΩ, RCA pin jack 2) When the module is attached to the SX-2100AI (option); monaural × 2, -10 dB*, 10 kΩ, RCA pin jack |
| A/D Converter | 24 bit |
| Sampling Frequency | 48 kHz |
| Frequency Response | 20 Hz - 20 kHz, ±1 dB (+4 dB* input) |
| Dynamic Range | 100 dB (IHF-A weighted) or more |
| Total Harmonic Distortion | 0.05 % or less |
| Finish | Panel: Pre-coated steel plate, black, 30 % gloss |
| Dimensions | 35 (W) × 119.5 (H) × 178.4 (D) mm |
| Weight | 145 g |


APPEARANCE



Top View

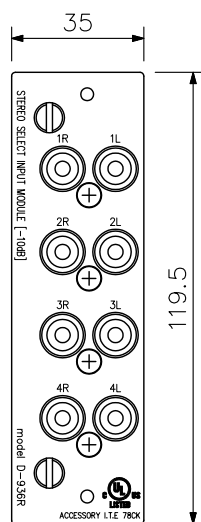

Front View

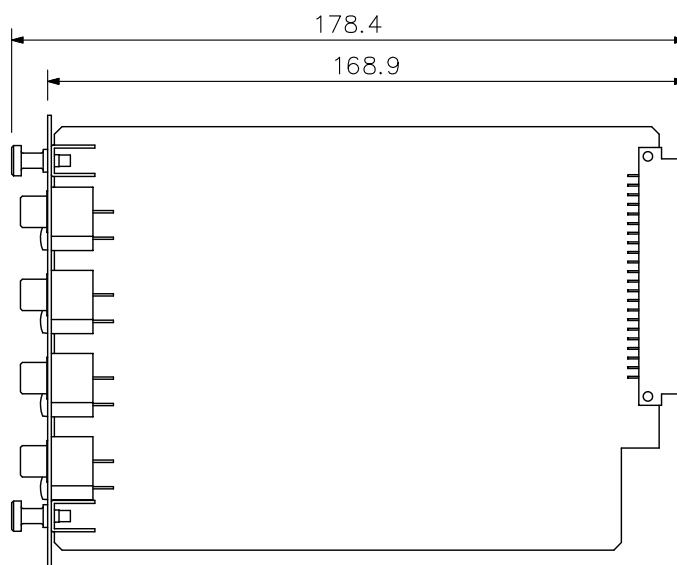

Side View

UNIT:mm SCALE:1/2