


DESCRIPTION

The ZS-2360-AS Ceiling Mount Speaker is of all metallic construction and ideal for use in a voice alarm system or BGM system. It features a spring clamp mechanism for easy mounting to the ceiling. The input impedance can be easily changed by changing the tap position of the transformer. The push-in type input terminal block makes cable connection easy and allows bridge wiring.

SPECIFICATIONS

Rated Noise Power	6 W (100 V Line), 3 W (70 V Line)
Rated Impedance	100 V line: 1.7 k Ω (6 W), 3.3 k Ω (3 W), 6.7 k Ω (1.5 W), 13 k Ω (0.8 W) 70 V line: 1.7 k Ω (3 W), 3.3 k Ω (1.5 W), 6.7 k Ω (0.8 W), 13 k Ω (0.4 W)
Sensitivity	94 dB (1 W, 1 m) (330 Hz – 3.3 kHz, pink noise)
Frequency Response	45 Hz – 20 kHz (pink noise –20 dB)
Speaker Component	16 cm (6") cone-type
Dimension for Fixing Hole	Mounting hole: $\varnothing 200 \pm 3$ mm [7.87" \pm 0.12"] Ceiling Thickness: 5 – 25 mm [0.2" – 0.98"]
Speaker Mounting Method	Suspension spring
Applicable Cable	Solid wire: 0.5 – 3 mm ² (AWG20–12)
Connection	Push wire connection (Bridging terminal 2-branch type)
Finish	Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint
Dimensions	$\varnothing 230 \times 5$ (exposed section) + 71 (D) mm ($\varnothing 9.06" \times 0.19" + 2.80"$)
Weight	900 g (1.98 lb)

APPEARANCE

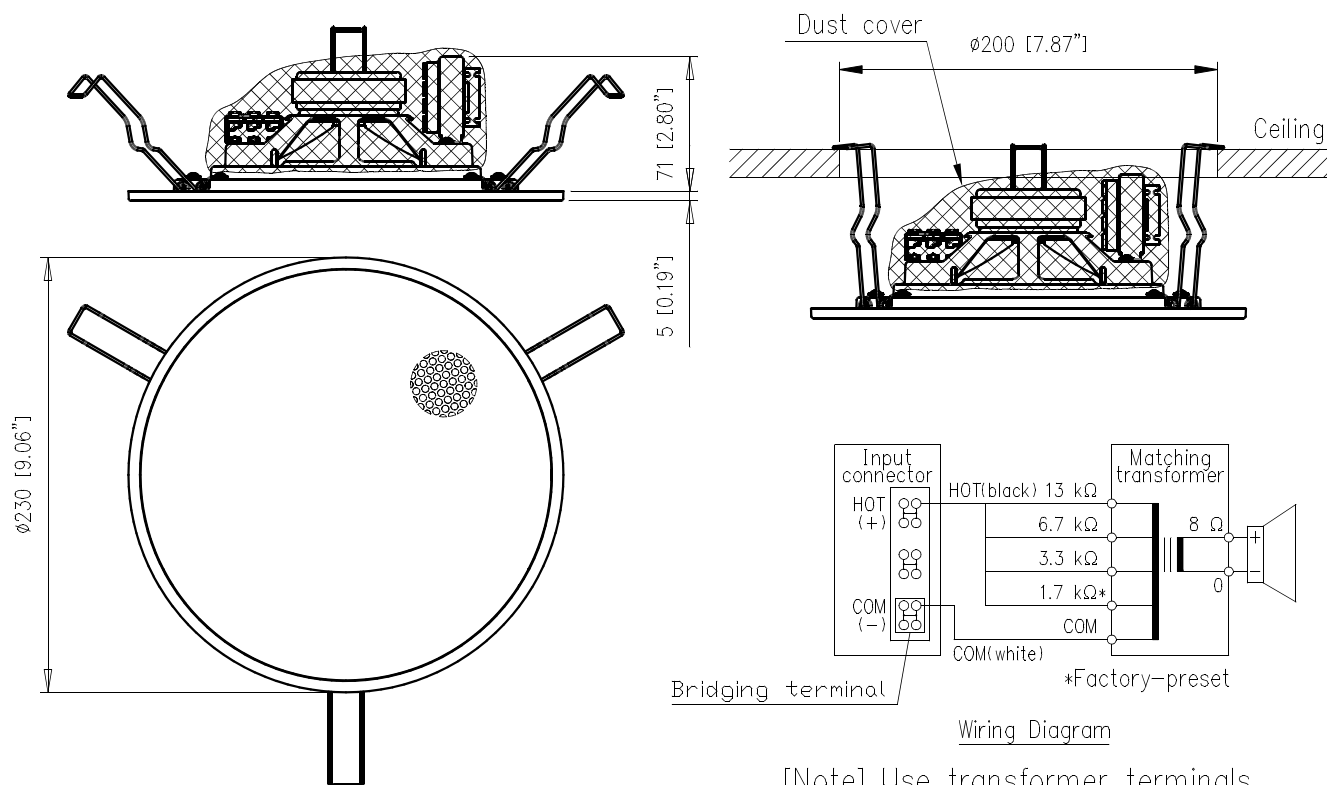

UNIT : mm [in] SCALE : 1/4