

■DESCRIPTION

The Z-FV200RF-AS Microphone Receiver Panel is used to connect the RM-200M Remote Microphone to the FV-200 Series Emergency Public Address System. Up to 4 RM-200M can be connected.


■SPECIFICATIONS

* 0 dB = 1 V


Power Source	Usable power supply unit : Z-FV200PS-AS 24 V DC (operating range : 19.5 - 27 V), M3 screw terminal
Current Consumption	230 mA
No. of Zone Groups in Speaker Selector	Max. 10 (Z-SS2010, Z-SS1010R)
Priority Control for Remote Micphone	Last-in-1st-out priority / 1st-in-1st-out priority / individual priority / selectable
Control Input	All call : 1 input, No-voltage make contact input, open voltage 24 V DC, short-circuit current : Under 5 mA, removable terminal block (2pins)
Control Output	SS Control : 55 outputs, open collector output, withstand voltage: 24V DC, control current: max. 15mA, removable terminal block (6 pins)
Chime	Ascending 4-note tone
RF Link	
Audio Output	0 dB*, unbalanced, Removable terminal block (2pins)
RM Link	
Usable Remote microphone	RM-200M Remote microphone extention unit : RM-210 (Max.4 unit)
No. of Connectable to Remote Microphone	Max. 4 RM-200M
Maximum Cable Distance	Total 800 m
S/N Ratio	Over 60 dB
Distortion	Under 1% (1kHz, rated output)
LED Indicator	Power (Green), Error (Red)
Operating Temperature	0°C to +40°C
Operating Humidity	Under 90% RH (no condensation)
Finish	Front Panel : Aluminum, black, paint
Dimensions	482 (W) X 44 (H) X 335.2 (D) in mm
Weight	2.8 kg
Accessory	Removable terminal plug (2pins)...2, Removable terminal plug (3pins)...1, Removable terminal plug (6pins)...10, Instruction Manual...1

■ APPEARANCE

Rear View



Front View

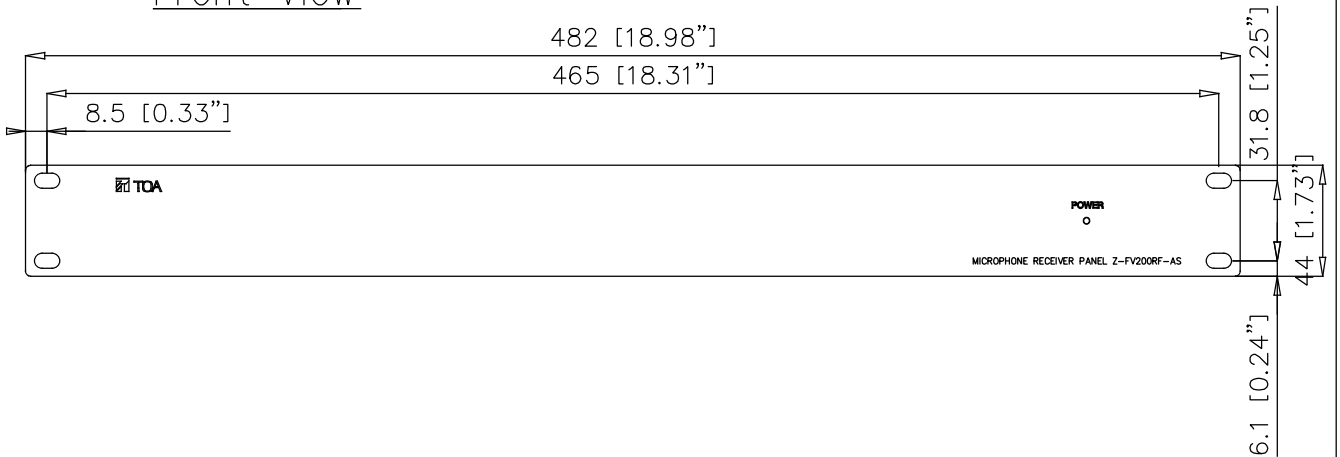

Right View

