

## DESCRIPTION


The Z-DH502-AS features a long horn which permits sounds to easily pass through and is ideal for providing public address information. It is designed to be used in conjunction with 2 driver units, and has an internal bird protector net to prevent insects and birds from getting into the unit.

## ■ SPECIFICATIONS

Applicable Drivers	ZH-662D (MD)
Sound Pressure Level	110 dB (1 W, 1 m) (when operated with drivers)
Frequency Response	200 Hz – 8 kHz (when the ZH-662D (MD) unit is used)
Driver Coupling Adapter	1 – 3/8 18 threads (inch screw)
Variable Installation Angle	Hor. : +15°, -15° ; Ver. : +15°, -15° (when locally procured mounting bracket is used)
IP rating	IP65 for Drivers (when be installed to Horn) *
Finish	Bell, Horn B and Adapter Y-Shaped : Aluminum, Grey, Powder coating Mounting Braket : Stainless Steel, Natural
Dimensions	ø500 × 846 (D) mm (ø19.69" × 33.31")
Weight	5.7 kg (12.57 lb)
Accessories	BH Screw M5x15 SUS 3-SEM ...4 pcs, Rubber Gasket ...1 pcs

\* Tentative value

## ■ APPEARANCE

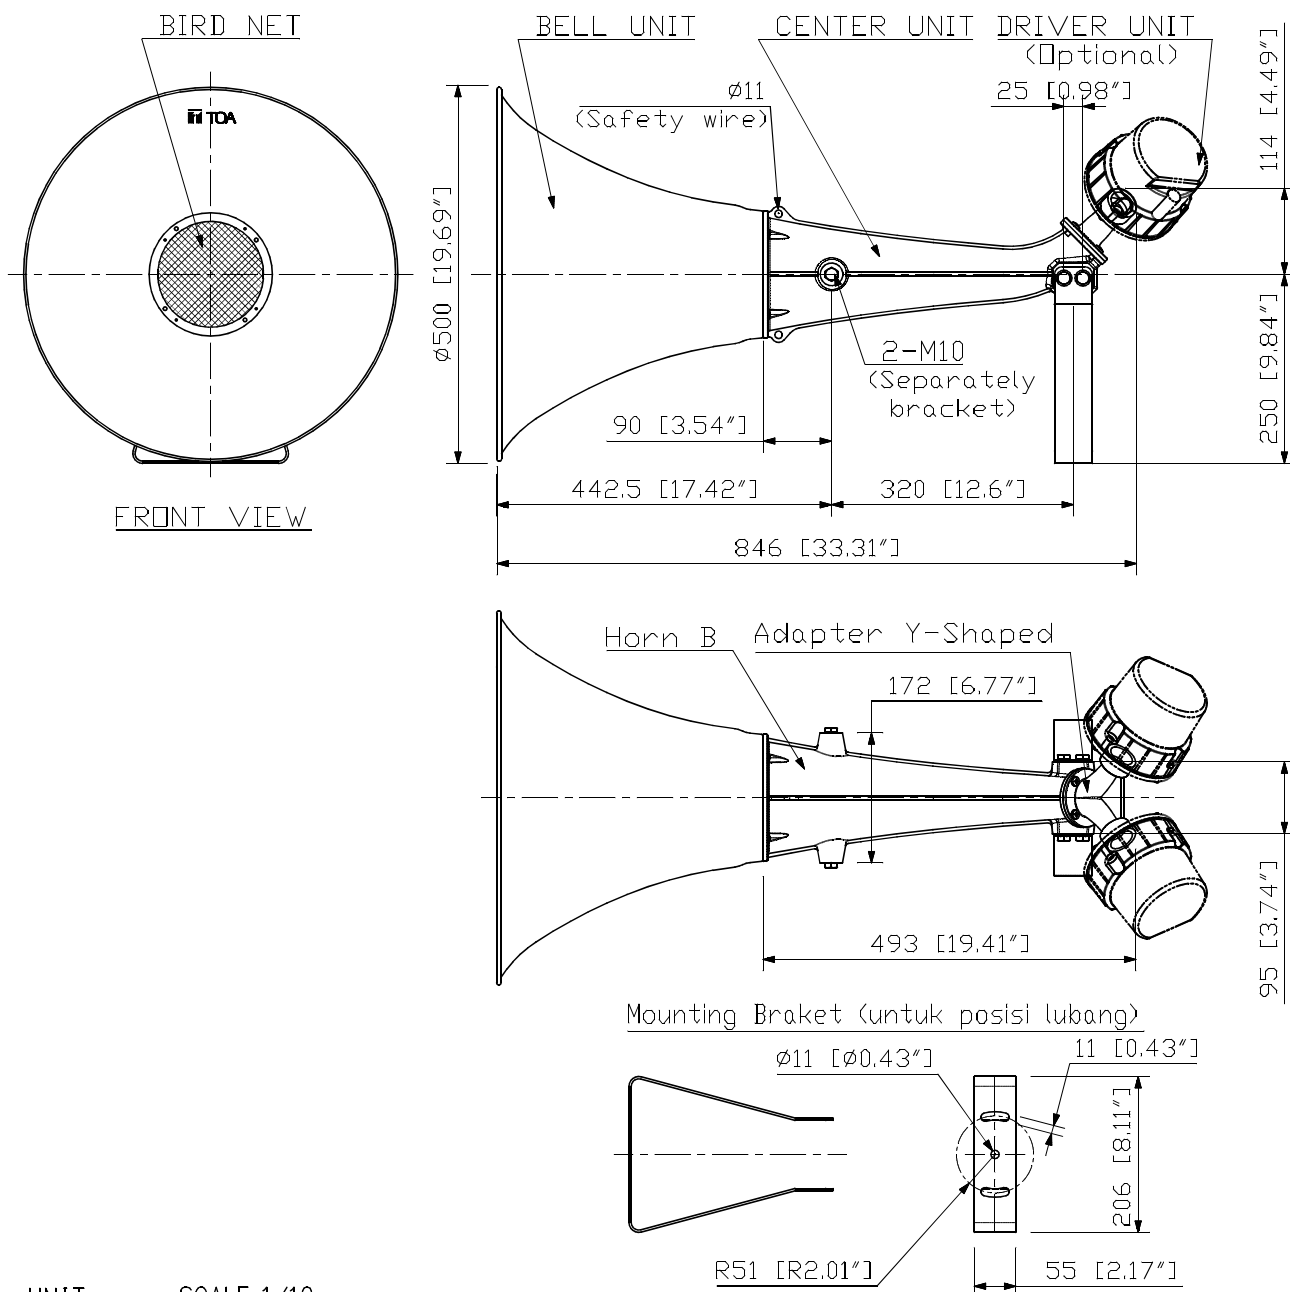

UNIT:mm SCALE:1/10