


DESCRIPTION

The SR-S4S is a two-way line array speaker ideal for short distance sound transmission and configures a line array by arranging speaker elements vertically close to each other. It can be converted into the bi-amplifier drive system by changing the internal connection. It can be used for high-impedance applications with the installation of the optional MT-S0601 Matching transformer.

SPECIFICATIONS

| | |
|-------------------------|---|
| Enclosure | Bass-reflex type |
| Power Handling Capacity | Continuous program: 600 W (single-amp mode) Low 240 W, High 240 W (bi-amp mode) |
| Rated Impedance | 8 Ω (single-amp mode) Low 8 Ω, High 8 Ω (bi-amp mode) |
| Sensitivity | 93 dB (1 W, 1 m) |
| Frequency Response | 70 Hz – 20 kHz (when recommended parameters are applied by the optional DP-SP3) |
| Crossover Frequency | 3.5 kHz |
| Directivity Angle | Horizontal: 90°, Vertical: 10° |
| Speaker Component | Low frequency: 10 cm cone-type × 8 High frequency: 2.5 cm balanced dome-type × 24 |
| Input Connector | M4 screw terminal, distance between barriers: 10 mm and Neutrik NL4MPXX × 2 |
| Finish | Enclosure: MDF, white, paint Front grille: Punched steel plate, white, acrylic paint |
| Dimensions | 160 (W) × 892 (H) × 303 (D) mm |
| Weight | 16 kg |
| Accessory | Bi-amplifier drive rating label ∙1, Bi-amplifier drive input indication label ∙1 |
| Option | Matching transformer: MT-S0601, Extension plate: SR-EP4, Flying bracket: SR-FB4, Wall tilt bracket: SR-TB4, Stand adapter: SR-SA4, Protection pad: SR-PP4, Digital speaker processor: DP-SP3 |

APPEARANCE

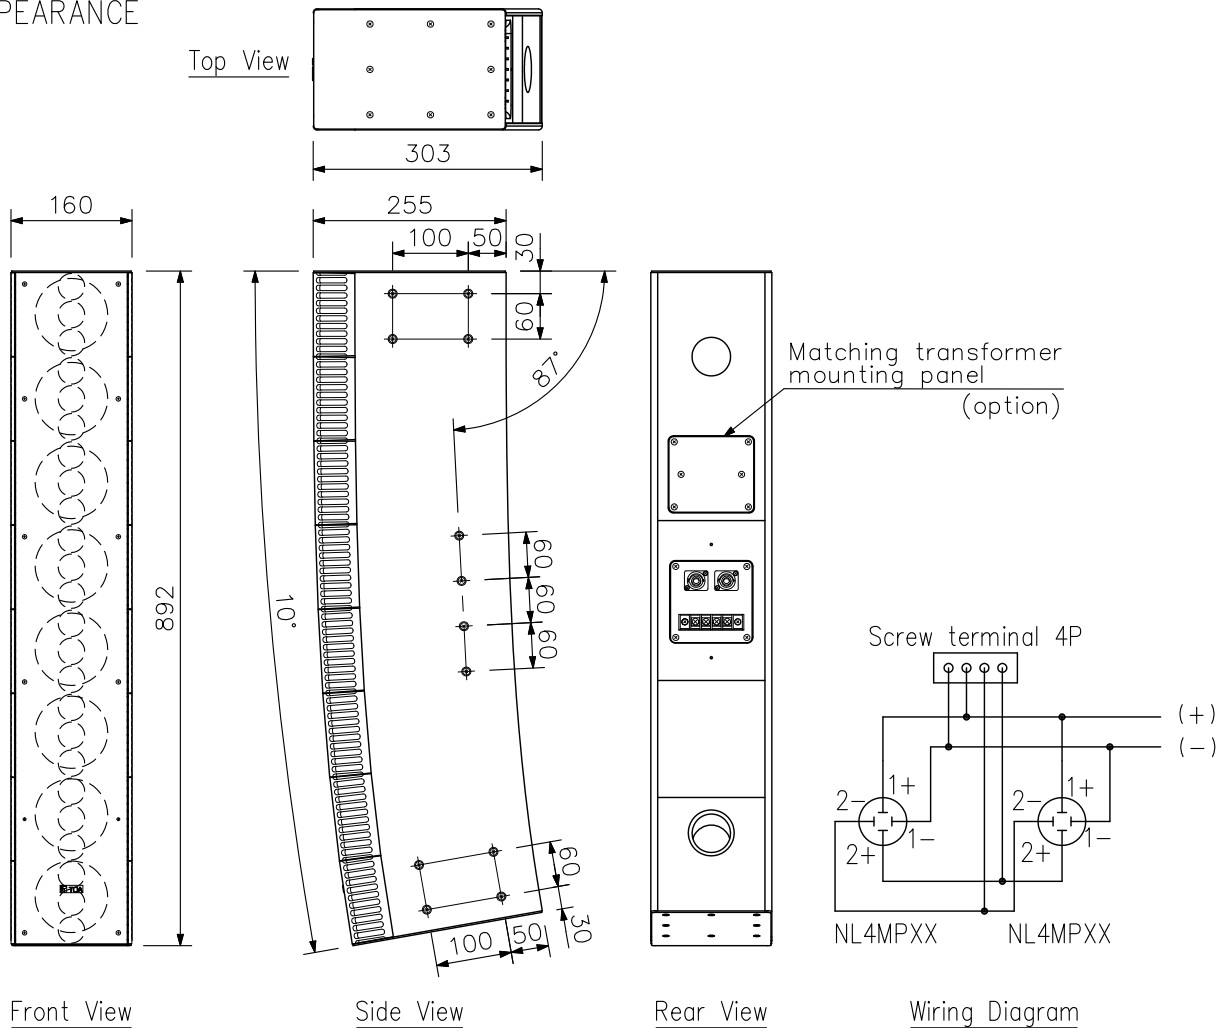

UNIT: mm SCALE: 1/10