# SPEAKER SELECTOR

Z-SS1010R


### **■**DESCRIPTION


 ${\sf TOA}$  speaker selector Z-SS1010R is a 10 zone BGM or 10 zone paging speaker selector. This highly efficient speaker selector can be installed with the public address system in schools, malls, offices, and places requiring the selection of speakers.

#### ■ SPECIFICATIONS


Voltage Course		24 // 00
Voltage Source		24 V DC
Current Consumption		0.4 A DC
Inputs		10 Inputs BGM / Paging
		1 Link as Input / Output
Output		10 Outputs with 3 wire R—H—C Each output max 480W
Controls	Front	10 BGM Selectors
		1 All Call Selector for All Paging
	Rear	1—10 Paging Controls In
		All Paging Control In for All Paging
Indicator Led		10 BGM Selector LEDs
		10 Paging Selector LEDs
		1 All Call LED
Operating Temperature		0°C to +40°C
Finish		Front Panel : Aluminum Hair Line, Etching Black
		Case : Steel Plate, Painting Black
Dimensions		420 (W) X 44 (H) X 320 (D) in mm
Weight		3.2 kg
Accessories		6P Connectors (12 Pcs)
		2P Connector (1 Pc)

#### ■ APPEARANCE

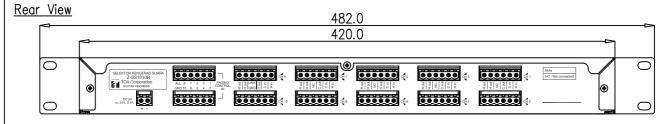

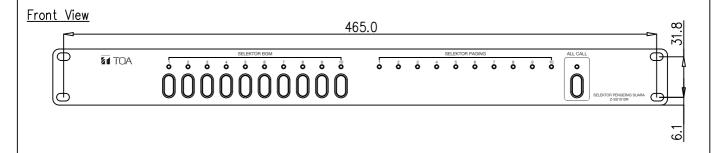

## Side View



UNIT: mm SCALE: 1/3