

■DESCRIPTION


The Z-7B-HX-AS is a 2-way compact speaker system that permits both constant directivity control over a wide frequency range and changes in vertical directivity. Its adopted wave front control technology is ideal for reproducing clear sound in spaces with long reverberation times or high background noise. The Z-7B-HX-AS is designed for indoor use.

■SPECIFICATIONS

Enclosure	Bass-reflex type
Power Handling Capacity	Continuous pink noise: 250 W (IEC60268-5: 350 W) Continuous program: 750 W
Rated Impedance	8 Ω
Sensitivity	100 dB (1 W, 1 m)
Frequency Response	75 Hz – 20 kHz
Crossover Frequency	1.7 kHz
Directivity Angle	Horizontal: 100° Vertical: Depending on directivity angle mode
Speaker Component	Low frequency: 13 cm (5.5") cone-type × 8 High frequency: Wave front control horn with compression driver × 4
Input Terminal	Speakon NL4MP × 2 and M4 screw terminal, distance between barriers: 9 mm (0.35")
Finish	Enclosure: Polypropylene, black Punched net: Surface-treated steel plate, black, paint Hanging bracket: Steel plate, t3.0, black, paint
Dimensions	497 (W) × 664 (H) × 274 (D) mm (19.57" × 26.14" × 10.79")
Weight	30 kg (66.14 lb)
Accessory	Hanging bracket L, R (L and R are symmetrical to each other.) ...1 each, Hanging bracket mounting bolt ...4
Option	Matching transformer: ZT-200 (*1) Matching transformer adapter: ZY-MT7-AS Speaker mounting bracket: ZY-60DB-AS, ZY-CN7B-AS, ZY-PF7B-AS


\* When mounting the ZT-200 Matching Transformer to the speaker, an optional ZY-MT7-AS Matching Transformer Adapter is required.

■APPEARANCE (Factory-preset: 0° mode)

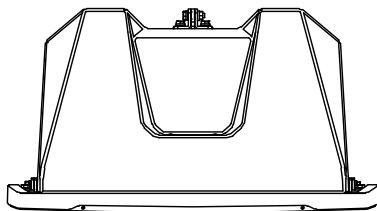


Top View

497 [19.57"]

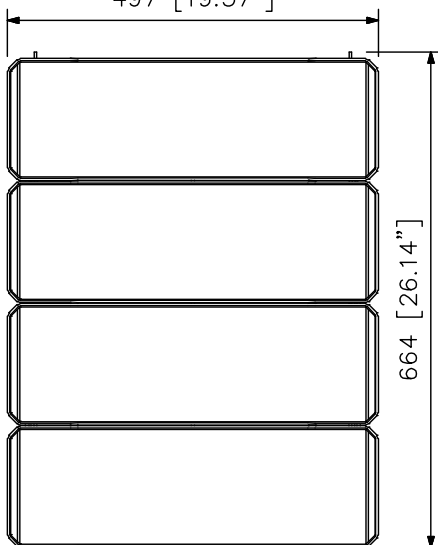


Front View

664 [26.14"]

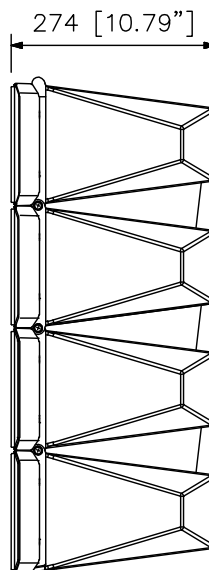

Side View

274 [10.79"]

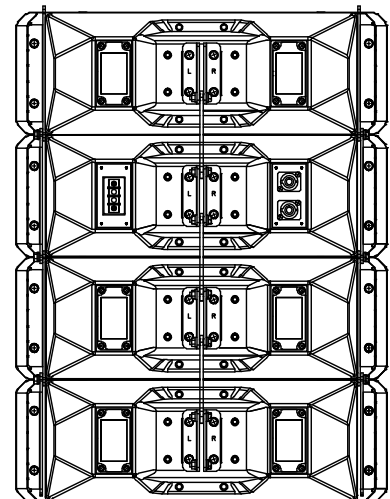

Rear View

UNIT:mm SCALE:1/10