




ZS-S240CW-AS

SLIM ARRAY SPEAKER

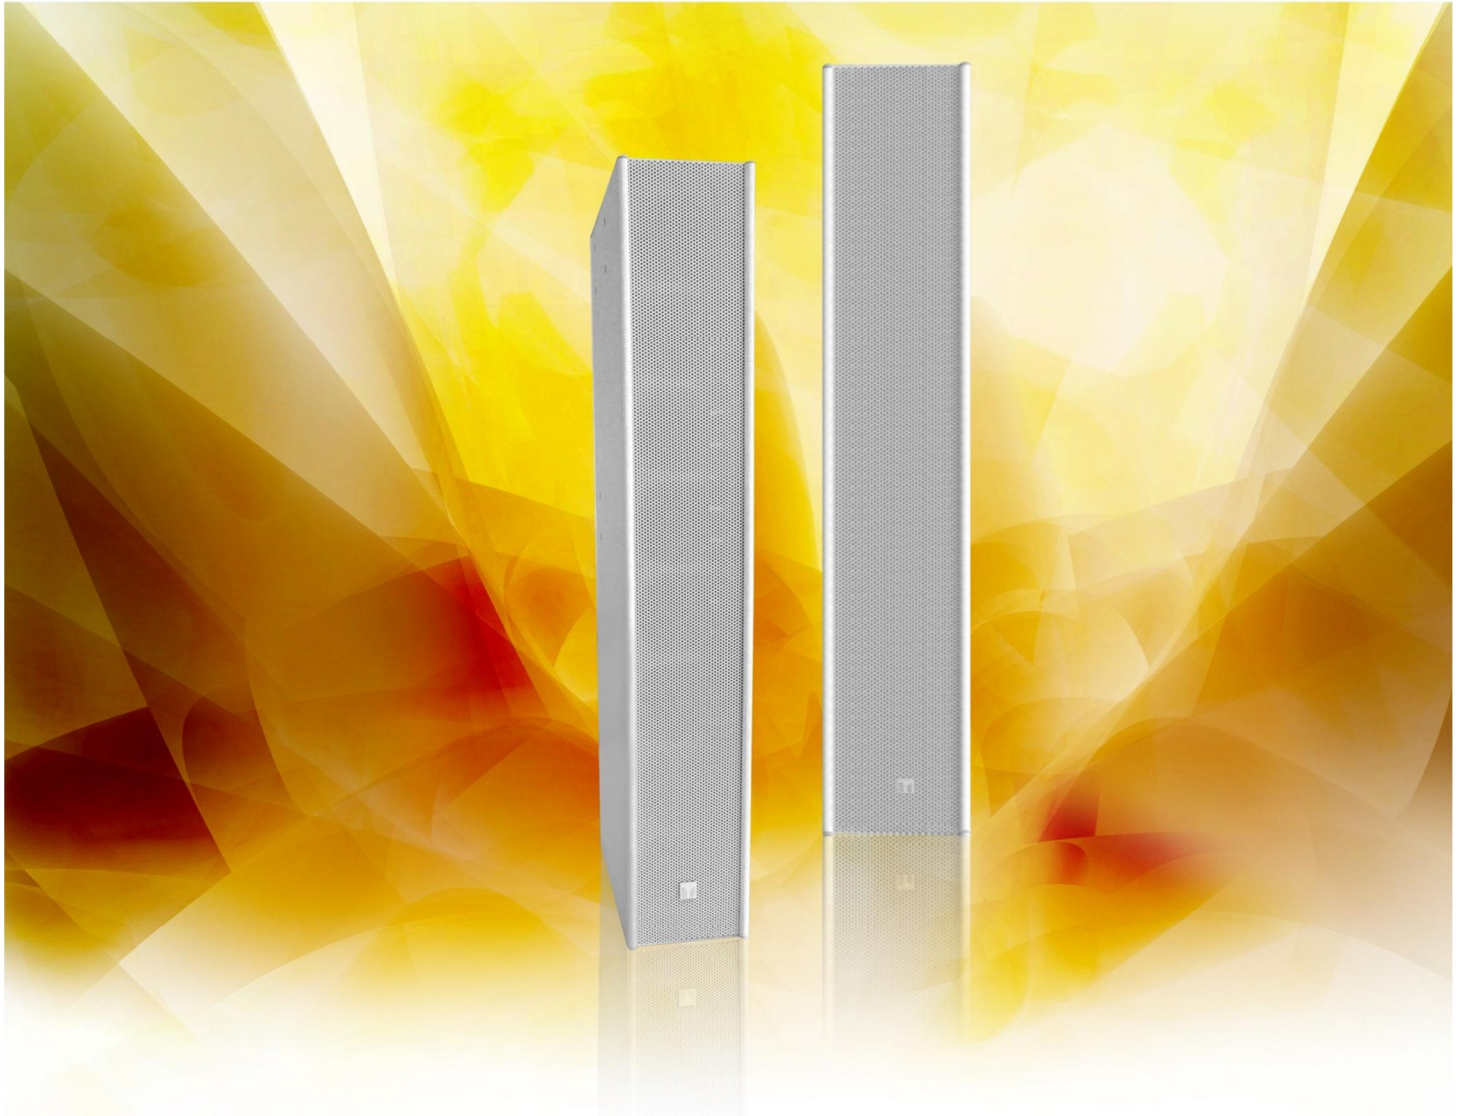

*Slim Array Speaker with Clear,
Well-focused Sound Enhancement*


ZS-S240CW-AS

SPECIFICATIONS

Enclosure	Bass Reflex Type		
Max Input Power	Continuous : 240W		
	Program : 480W		
Rated Impedance	8Ω		
Sensitivity	94 dB (1W, 1m)		
Frequency Response	95 - 20,000 Hz		
Crossover Frequency	2500 Hz		
Directivity	Horizontal : 100°, Vertical : 5°		
Speaker Component	Low Frequency : 10cm (4") Cone Type Woofer x 8		
	High Frequency : 2.5cm (1") Balanced Dome Tweeter x 24		
Input Connector	M4 Screw Terminal x 2		
Operating Temperature	-10° ~ + 50° C		
Finish	Enclosure : White Painted MDF Board		
	Net Grille : White Painted Punched Still Plate		
Dimensions	160(W) x 950(H) x 262(D) mm		
Weight	17kg		
Accessories	Mounting Bracket x 2		
Option	Flying Bracket	: SR-FB4	Stand Adaptor : SR-SA4
	Wall Tilt Bracket	: SR-TB4	Floor Stand : SR-FS4
	Extension Plate	: SR-EP4	Matching Transformer : MT-S0601
	Wall Mounting Bracket	: SR-WB4	(for High Impedance)

* Specifications are subject to change without notice for improvement

■ APPEARANCE

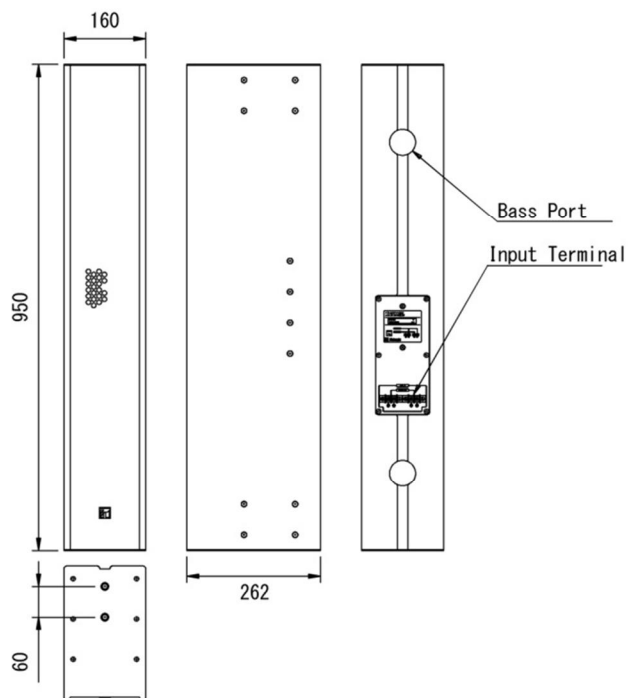

UNIT:mm SCALE:1/12