




ZS-S240CW-AS

SLIM ARRAY SPEAKER

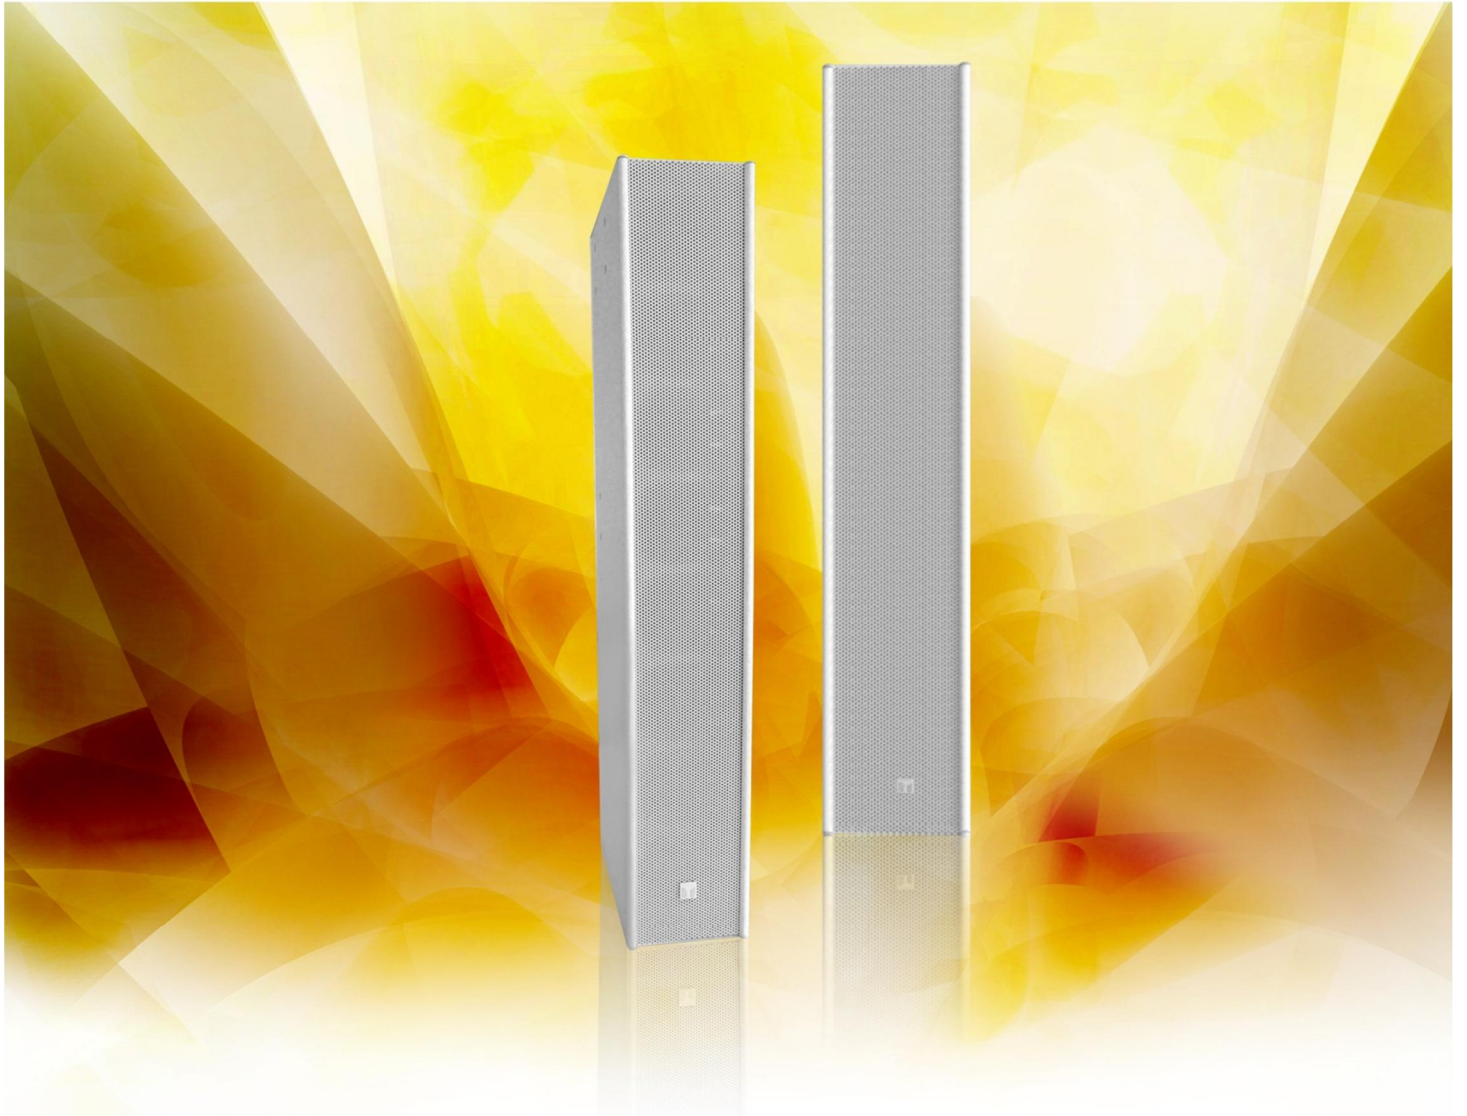

*Slim Array Speaker with Clear,
Well-focused Sound Enhancement*


ZS-S240CW-AS

SPECIFICATIONS

| | | | |
|-----------------------|--|----------|---------------------------------|
| Enclosure | Bass Reflex Type | | |
| Max Input Power | Continuous : 240W | | |
| | Program : 480W | | |
| Rated Impedance | 8Ω | | |
| Sensitivity | 94 dB (1W, 1m) | | |
| Frequency Response | 95 - 20,000 Hz | | |
| Crossover Frequency | 2500 Hz | | |
| Directivity | Horizontal : 100°, Vertical : 5° | | |
| Speaker Component | Low Frequency : 10cm (4") Cone Type Woofer x 8 | | |
| | High Frequency : 2.5cm (1") Balanced Dome Tweeter x 24 | | |
| Input Connector | M4 Screw Terminal x 2 | | |
| Operating Temperature | -10° ~ + 50° C | | |
| Finish | Enclosure : White Painted MDF Board | | |
| | Net Grille : White Painted Punched Still Plate | | |
| Dimensions | 160(W) x 950(H) x 262(D) mm | | |
| Weight | 17kg | | |
| Accessories | Mounting Bracket x 2 | | |
| Option | Flying Bracket | : SR-FB4 | Stand Adaptor : SR-SA4 |
| | Wall Tilt Bracket | : SR-TB4 | Floor Stand : SR-FS4 |
| | Extension Plate | : SR-EP4 | Matching Transformer : MT-S0601 |
| | Wall Mounting Bracket | : SR-WB4 | (for High Impedance) |

* Specifications are subject to change without notice for improvement

■ APPEARANCE

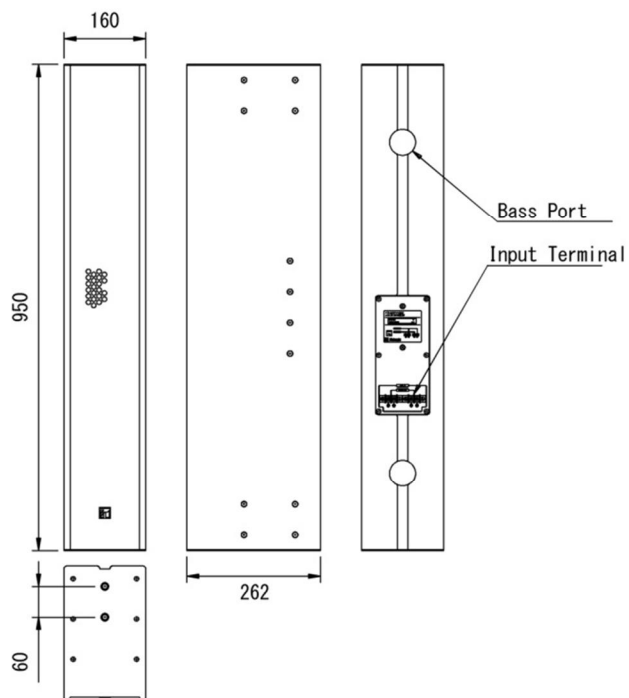

UNIT:mm SCALE:1/12