

DESCRIPTION


The ZA-2240 is a high cost-performance power amplifier suited for broadcasting paging or background music in school, offices, shops, factories, mosques, churches, and large rooms.

SPECIFICATIONS

* 0 dBV = 1 V

| | |
|---------------------|---|
| Power Source | 220 - 240V AC, or 24V DC |
| Rated Output | 240 W |
| Power Consumption | 238 W (AC Operation EN60065) |
| Current Consumption | 15.0 A (DC Operation at Rated Output) |
| Frequency Response | 50 - 20,000 Hz (± 3 dB) |
| Distortion | Less Than 1% at 1 kHz, 1/3 Rated Power |
| Input | MIC 1 - 3 : -60 dBV* (1.0 mV), 600 Ω , Balanced, Equivalent to Phone Jack Type AUX 1, 2 : -20 dBV* (100 mV), 10k Ω , Unbalanced, RCA Pin Jack |
| Output | Speaker Out : Balanced (Floating) High Impedance : 42 Ω (100 V), 21 Ω (70 V) Low Impedance : 4 Ω (31 V) Rec Out : 0 dBV* (1.0 V), 600 Ω , Unbalanced, RCA Pin Jack |
| Phantom Power | DC +21 V (MIC 1) |
| S/N Ratio | More Than 60 dB |
| Tone Control | Bass : ± 10 dB at 100 Hz Treble : ± 10 dB at 10 kHz |
| Muting | MIC 1 : Mutes Other Input Signals by 0 -30 dB Attenuation |
| Indicator | Power LED, Signal LED, Peak LED |
| Finish | Panel : ABS Resin, Black Case : Steel Plate, Black |
| Dimensions | 420 (W) X 101 (H) X 360 (D) in mm, or 16.5 (W) X 4.0 (H) X 14.2 (D) in inches |
| Weight | 13.2 Kg (29.10 lb) |

APPEARANCE

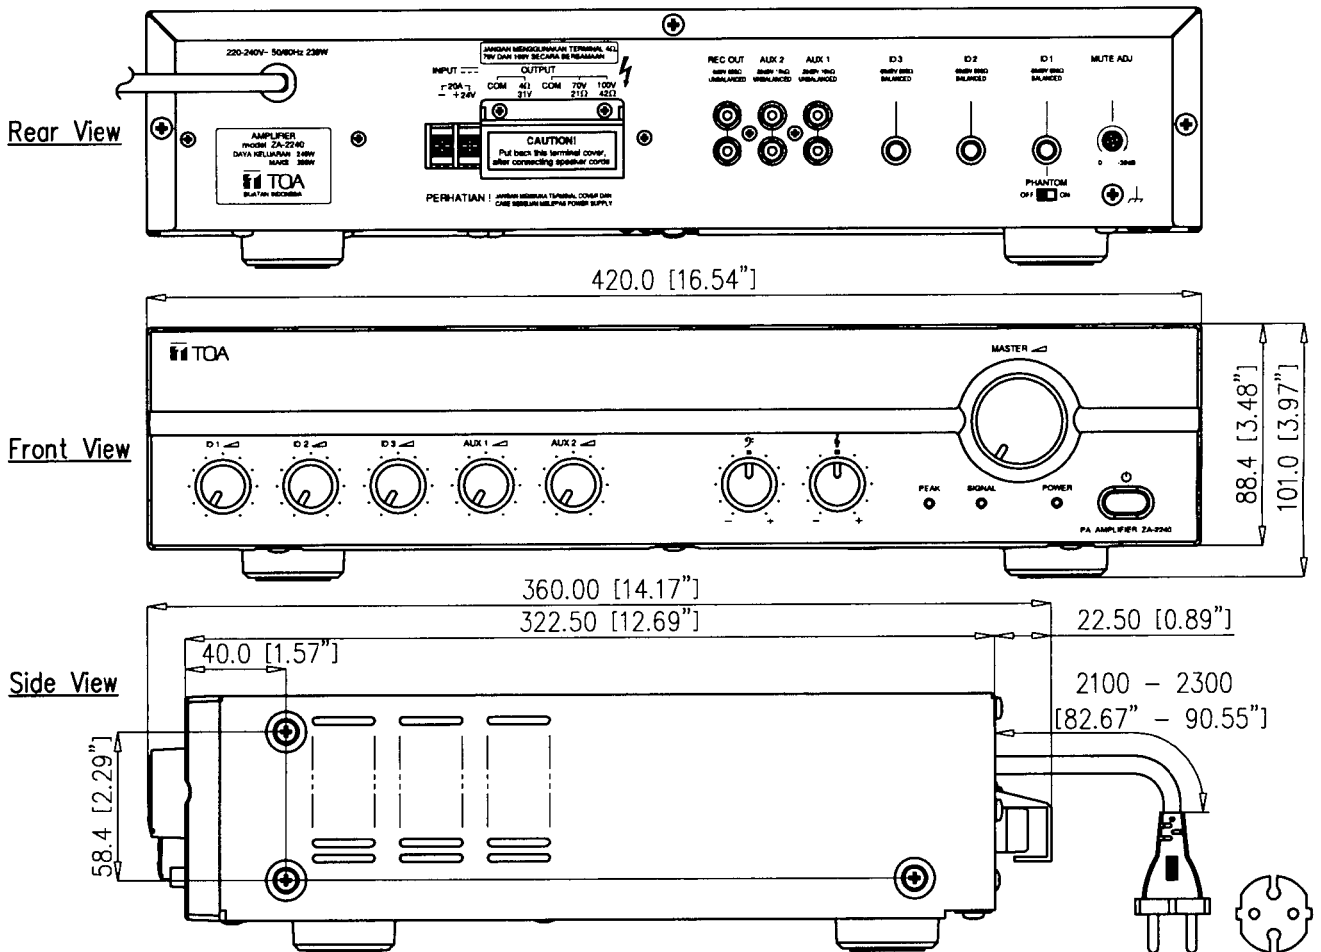

UNIT : mm SCALE : 1/3