

DESCRIPTION


The ZP-2240 is a high cost-performance power amplifier suited for broadcasting paging or background music in school, offices, shops, factories, mosques, churches, and large rooms.

SPECIFICATIONS

* 0 dBV = 1 V

Power Source	220 - 240V AC, or 24V DC	
Rated Output	240 W	
Power Consumption	238 W (AC Operation EN60065)	
Current Consumption	15.0 A (DC Operation at Rated Output)	
Frequency Response	50 - 20,000 Hz (± 3 dB)	
Distortion	Less Than 1% at 1 kHz, 1/3 Rated Power	
Input	Line In	: 0 dBV* (1.0 V), 10k Ω , Balanced, Screw Terminal
	Loop Out	: 0 dBV* (1.0 V), 10k Ω , Balanced, Screw Terminal
	100V line In	: 40 dBV* (100 V), 330k Ω , Unbalanced, Screw Terminal
	Power Remote	: Power Remote Control by Make Contact Input
Output	Speaker Out	: Balanced (Floating)
	High Impedance	: 42 Ω (100 V), 21 Ω (70 V)
	Low Impedance	: 4 Ω (31 V)
S/N Ratio	More Than 60 dB	
Tone Control	Bass	: ± 10 dB at 100 Hz
	Treble	: ± 10 dB at 10 kHz
Controls	Front Panel	1-Master VR, 1-Bass Tone VR, 1-Treble Tone VR (Semi-Fixed Type) 1-Power Switch
	Rear Panel	1-SP-100V Line VR (Semi-Fixed Type), Remote Power Control Terminal
Indicator	Power LED, Signal LED, Peak LED	
Finish	Panel	: ABS Resin, Black
	Case	: Steel Plate, Black
Dimensions	420 (W) X 101 (H) X 360 (D) in mm, or 16.5 (W) X 4.0 (H) X 14.2 (D) in inches	
Weight	13.2 Kg (29.10 lb)	

APPEARANCE

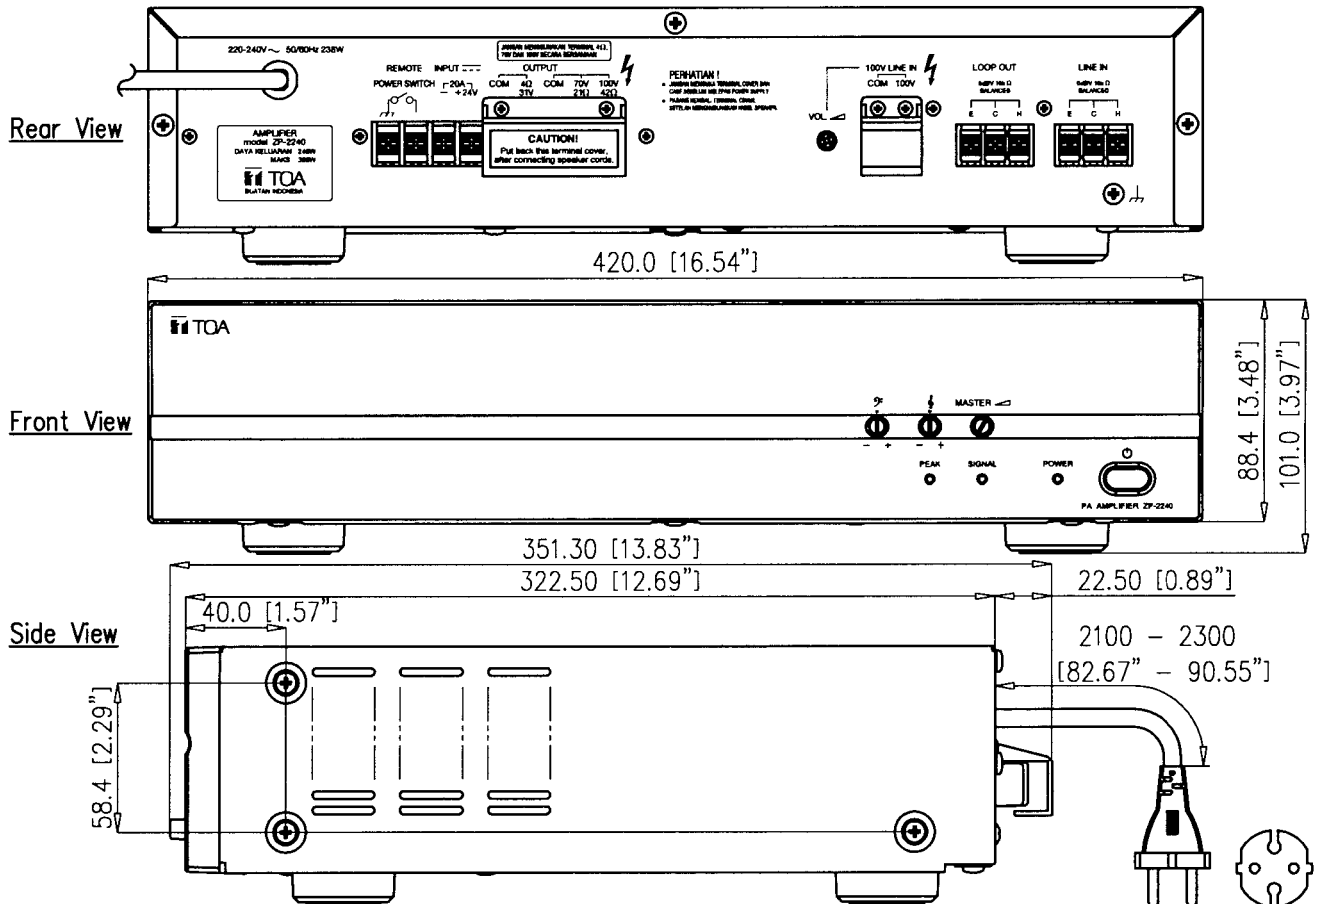

UNIT : mm SCALE : 1/3