


■DESCRIPTION

The TS-D1000-M1 Microphone is a dedicated component of the Digital conference system's Chairman unit and Delegate unit.  
 Its mic head is equipped with an illuminated display ring that allows the status of the units in use to be monitored at a glance.

■SPECIFICATIONS

Type	Electret condenser microphone
Directivity	Unidirectional
Rated Impedance	1.4 kΩ
Rated Sensitivity	-37 dB (1 kHz 0 dB = 1 V/Pa)
LED Indicator	Speech indicator (ring type) Red
Frequency Response	100 Hz - 13 kHz
Output Connector	Equivalent to XLR-3-12C
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Gooseneck: Stainless steel, black Other: ABS resin, black
Length	518 mm (1.7 ft)
Weight	110 g (0.24 lb)
Applicable Unit	Chairman unit: TS-D1000-CU Delegate unit: TS-D1000-DU

■APPEARANCE

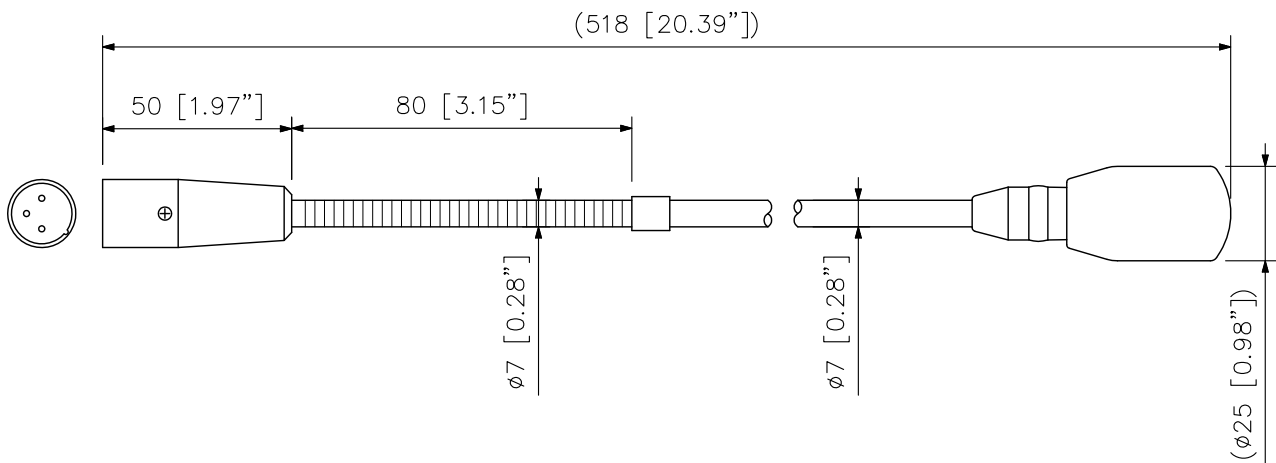

UNIT:mm SCALE:1/2

Note: Numerical values in parentheses are for reference only.