


## DESCRIPTION

The RM-210F is an expansion unit dedicated for the RM-300X Desk top remote microphone. The number of zone selection keys and indicators of the RM-300X can be increased in 10 units per RM-210F.


## SPECIFICATIONS

Power Source	Supplied from the RM-300X (option)
AC Power Consumption	2.4 W (Including power supply loss of the Emergency power panel) 0.4 W (Standby, including power supply loss of the Emergency power panel)
Current Consumption	80 mA or less (Increase in power input at the RM-300X (option))
Operation	Zone selection key × 10
Indicators	Function switch indicator × 10, Zone selection indicator × 10
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	35 % to 80 %RH (no condensation)
Finish	ABS resin, black, semi-gloss
Dimensions	110 (W) × 76.5 (H) × 215 (D) mm (4.33" × 3.01" × 8.46")
Weight	350 g (0.77 lb)
Accessory	Connection cable (8 pins, 8 cm (3.15")) ×1, Joint bracket A ×2, Joint bracket B ×1, Screw for joint bracket ×12
Applicable Unit	Remote microphone: RM-300X
Option	Wall mounting bracket: WB-RM200


## APPEARANCE



Rear View

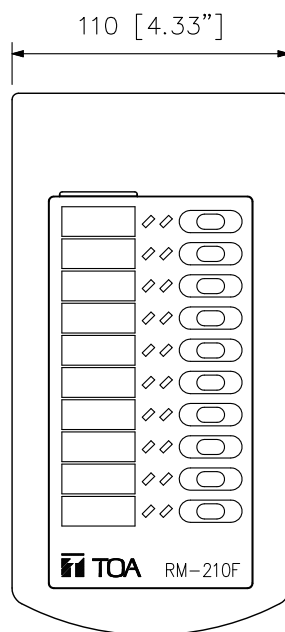

Top View

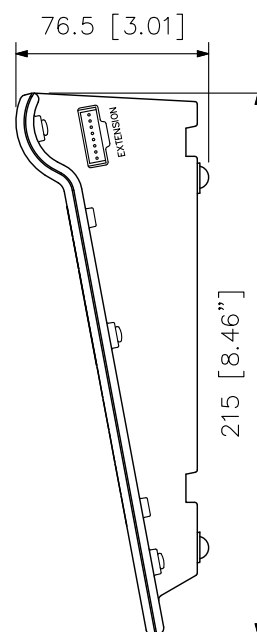

Side View

UNIT: mm SCALE: 1/3