

DESCRIPTION


The VP-1061(301H) power amplifier can be used for rack-mount application.

SPECIFICATIONS

\* 0 dB = 1 V


Power Source	AC: 230 V AC, 50/60 Hz DC: 24 V DC
Power Consumption	AC: 170 W (at rated output), 100 W (EN60065), 14 W (no-signal) DC: 4.5 A (at rated output), 0.1 A (no-signal)
Rated Output	60 W
Input	2 program inputs (parallel), 0 dB*, 20 kΩ, balanced 2 priority inputs (parallel), 0 dB*, 20 kΩ, balanced
Impedance	167 Ω (100 V)
S/N Ratio	80 dB or more
Total Harmonic Distortion	1 % or less (at rated output f = 1 kHz)
Frequency Response	80 Hz - 16 kHz, ±3 dB (at 1/3 rated output)
Ventilation	Fan cooling
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Panel: Aluminum, black, alumite
Dimensions	210 (W) × 88.4 (H) × 338.7 (D) mm (8.27" × 3.48" × 13.33")
Weight	6.9 kg (15.21 lb)
Accessory	Power cable (2 m (6.56 ft)) ---1, Removable terminal plug (2 pins) ---2, Removable terminal plug (3 pins) ---2, Removable terminal plug (5 pins) ---2, Joint plate ---1, Joint plate mounting screw ---3, Fuse (1.25 A) ---1
Option	Fault detector: YA-1000A Half width blank panel: MB-25B-BK (for rack mounting one VP-1061 unit) Rack joint bracket: MB-25B-J (for rack mounting two VP-1061 units)

APPEARANCE

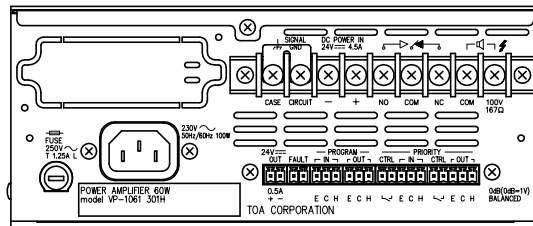

Rear View

210 [8.27"]

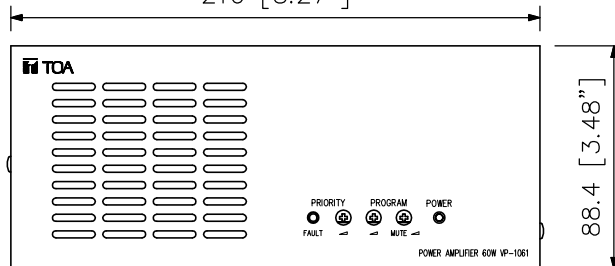


Front View

88.4 [3.48"]

338.7 [13.33"]

321.5 [12.66"]

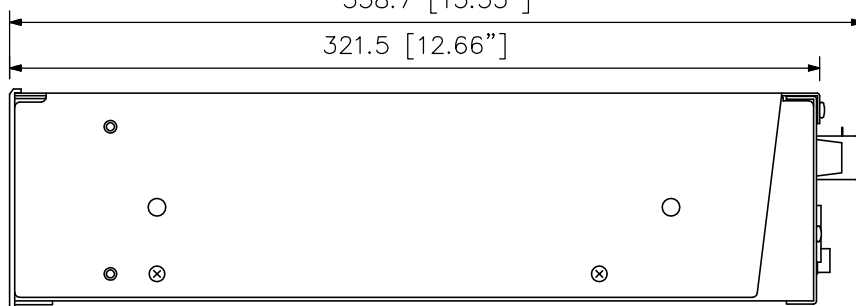

Side View

UNIT: mm SCALE: 1/3