

DESCRIPTION



The ZM-362-AS is a neck worn condenser microphone that is designed exclusively for leader prayer in mosque (Imam) and other applications where constant body movement is unavoidable. This product is equipped with an optional power that is selectable between battery and phantom power. The microphone position can be easily adjust near the mouth for best pick up.

SPECIFICATIONS

Power Source	3 V DC (2 X "AAA" batteries) or Phantom Power : 9 ~ 52 V
Microphone element	Electret Condenser
Polar Pattern	Cardioid
Rated Impedance	600 Ω, Balanced
Rated Sensitivity	-35 dB ± 3 dB (1kHz 0dB = 1V/Pa)
Frequency Response Mic.	60 Hz ~ 20 kHz
Output Connector	1/4 " Balanced L Plug, 200 mm
Cable Length	7 m
Operating Temperature	0 °C ~ 40 °C (32 °F ~ 104 °F)
Finish	Battery Case Unit, Switch Unit, Mic Unit : ABS Resin, Black Flexible Shaft : Copper Alloy, Black, Paint, Shield tube Wire Hanger : Steel wire shield rubber, Black, Paint
Dimensions	260 mm (H) x 135 mm (W) [10.24" x 5.31"]
Weight	190 g (exclude batteries)

Note: Batteries are not supplied with the unit.

APPEARANCE

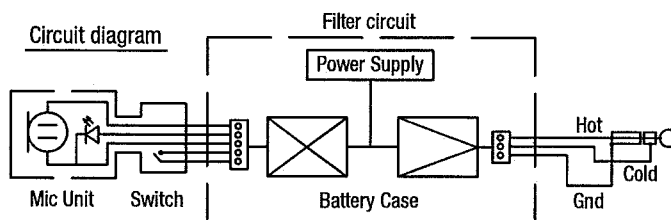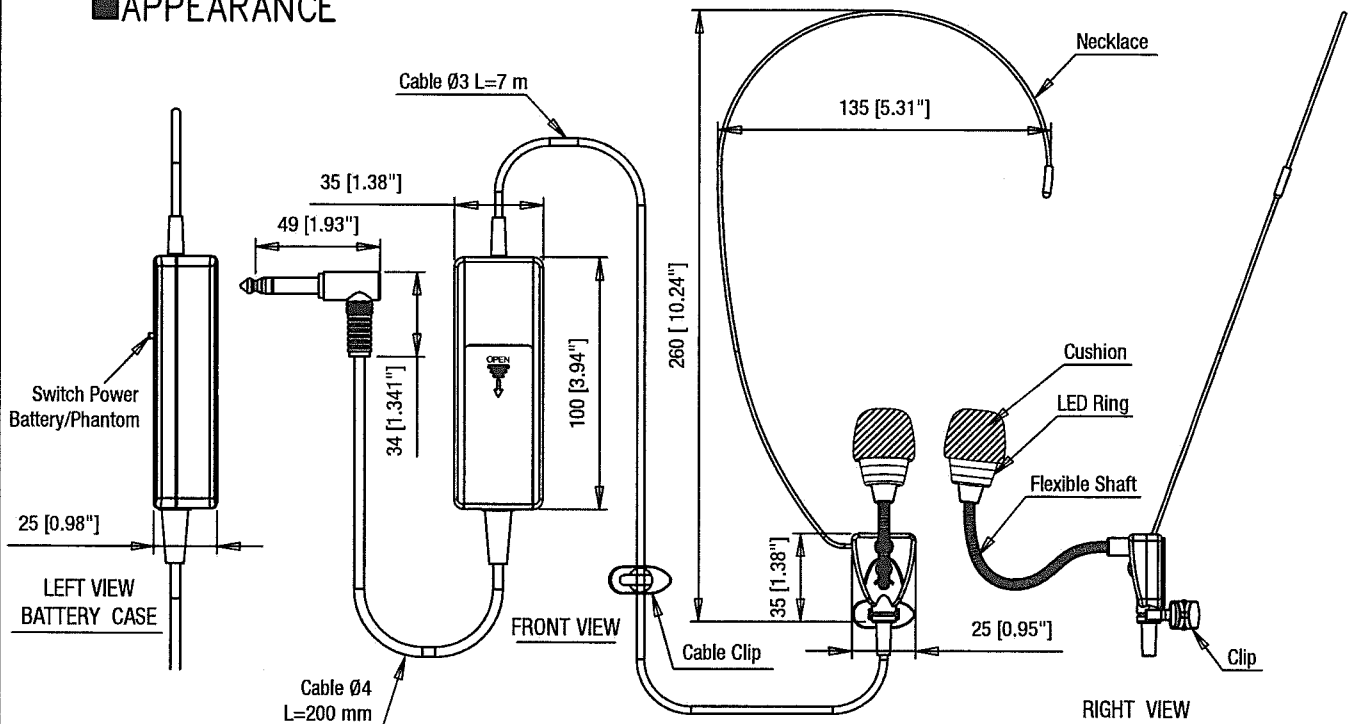

UNIT : mm [in] SCALE : 1/3