

DESCRIPTION

The Z-FV208EV-AS Emergency Message Panel operates within the section of the Z-FV200 Series Emergency Public address system. This panel is not required if the system is to be used solely for general-purpose public address application. It is possible to start and reset emergency broadcast through automatic or manual operation. The Z-FV208EV-AS come with 8 pre-recorded emergency message which is alert, evacuation, false, clear, message 1, message 2, message 3, message 4.


SPECIFICATIONS

* 0 dB = 1 V


Power Source	24 V DC (operating range : 19.5 ~ 27 V) M3 Screw terminal Usable power supply unit : Z-FV200PS-AS
Current Consumption	200 mA (rated) 100 mA (standby)
Message Announcement	8 Messages : Alert, Evacuation, False, Clear, Message 1, Message 2, Message 3, Message 4 Repeated continuously
Audio Input	Fireman's microphone (accessory) : -55 dB* 2.2 kΩ, unbalanced, XLR connector SD/MMC card slot (up to 32 GB, Type file : MP3 File)
Audio Output	EV Output : -20 dB*, unbalanced, Removable terminal block
Control Input	FA Input, Stop, 8 Messages contact input : No-voltage make contact input, open voltage : 24 V DC, Short circuit current : Under 5 mA, Removable terminal block
Control Output	EV Output : Contact switch (normally open), Removable terminal block 8 Control outputs : Relay contact output, rated voltage : 24 V DC
Frequency Response	20 - 20,000 Hz, ±3 dB
Distortion	Under 1 % (1 kHz, Rated output)
Indicator	Power, Fire, Alert, Evacuation, False, Clear, Message 1, Message 2, Message 3, Message 4
Format File	MP3 File (Bit rate 320 kbps)
Recording System	USB data transfer
Maximum Recording Time	25 minutes
Operating Temperature	0 °C to +40 °C
Operating Humidity	Under 90% RH (no condensation)
Finish	Front Panel : Aluminum, Black, Anodize Case : Steel Plate, Black, Painting
Dimensions	482 (W) x 100 (H) x 281 (D) mm (18.97" x 3.93" x 11.06")
Weight	2.3 kg (5.07 lbs) (with microphone)
Accessories	Removable terminal plug (2 pins) ...4 Removable terminal plug (8 pins) ...4, Fireman's microphone ...1,

■ APPEARANCE

Front View

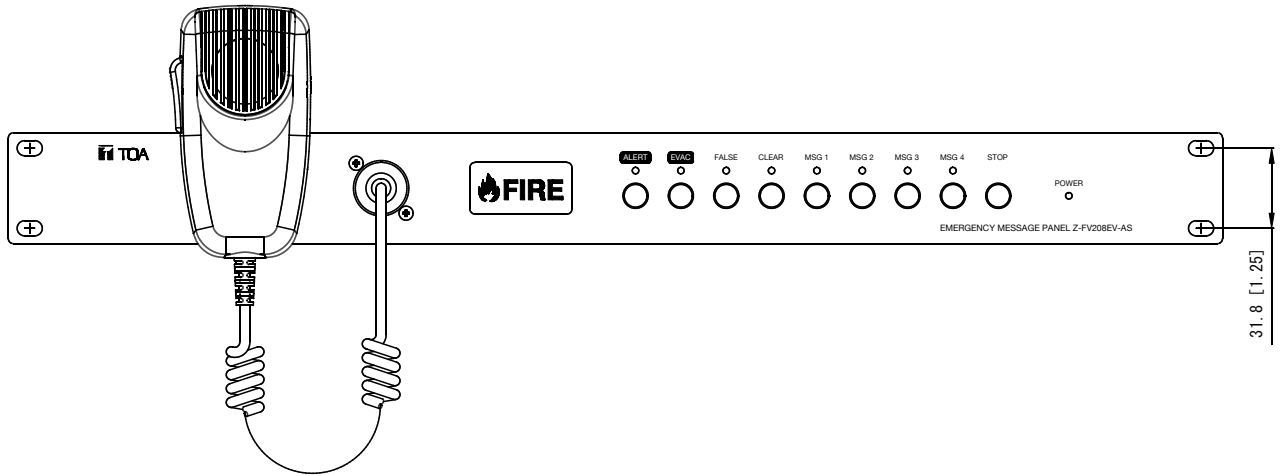

Rear View

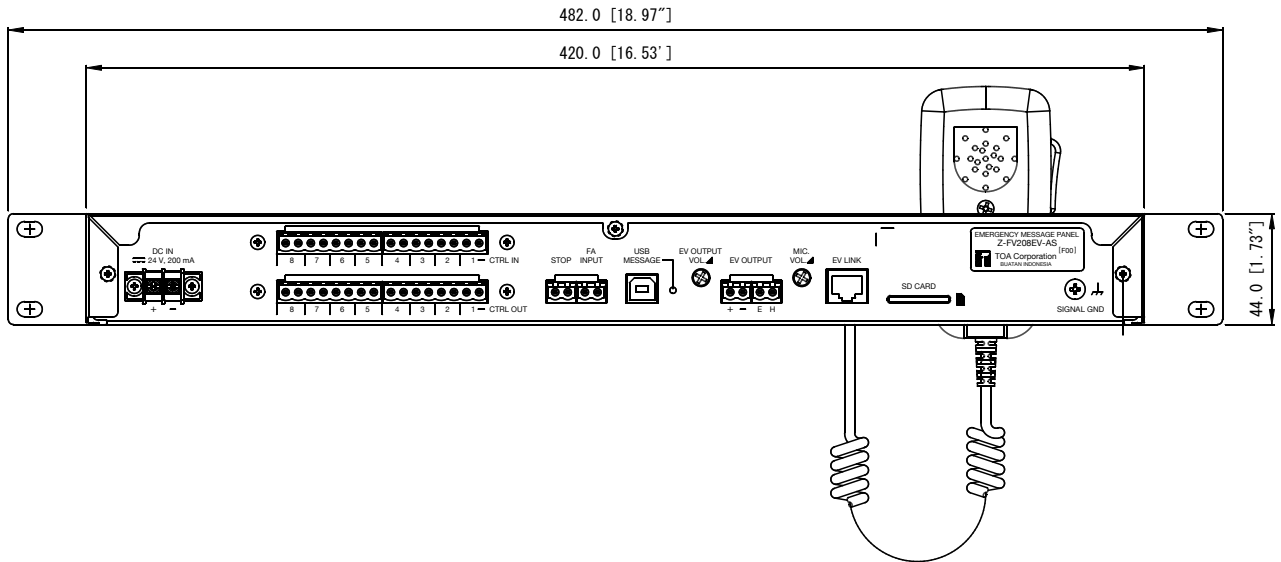

Side View

