

## DESCRIPTION


TOA's Z-MD300A-AS is a media player and digital processing FM radio tuner. the unit has a USB and SD card slot that allows MP3 Playback and also has a Bluetooth function for receiving audio signals. the Radio Has the capability to store up to 30 channels. the unit can be mounted on a EIA equipment rack.

## SPECIFICATIONS


Power Source	24 V DC M3 Screw terminal or DC socket connector
Current Consumption	350 mA
Frequency Response	20 – 20,000 Hz, ±3 dB
Tuner Receiving Frequency	87.5 – 108 MHz (50 kHz step)
Audio Input	USB port for memory stick (up to 32 GB, Type file: MP3 file) SD card slot (up to 32 GB, Type file: MP3 file) FM antenna terminals Bluetooth
Audio Output	RCA audio output L and R channels for PRIORITY RCA audio output L and R channels for TUNER RCA audio output L and R channels for USB/SD/BLUETOOTH
Control Input	Play track 1 – 3, Play All, Stop : No-voltage make contact input, open voltage : 24 V DC, Short circuit current : Under 5 mA, Removable terminal block
Channels of memory Tuner	30 Channels in total for FM broadcasts
Indicators	LCD Display Light Blue 3 LED Indicator Light Green
Operation Temperature	0 °C to +40 °C
Operation Humidity	Under 90% RH (no condensation)
Finish	Front Panel : Aluminum, Black, Anodize Case : Steel Plate, Black, Painting
Dimensions	482 (W) x 44 (H) x 229.5 (D) mm (18.97" x 1.73" x 9.03")
Weight	2.1 kg
Accessories	Remote Control ...1, Antenna FM Radio ...1, Removable terminal plug (2 pins) ...1, Removable terminal plug (3 pins) ...2

## APPEARANCE


Front View

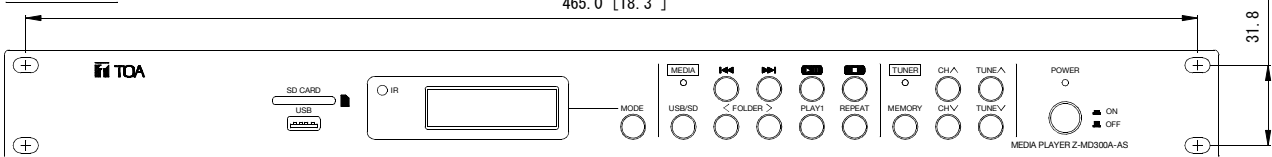


Rear View

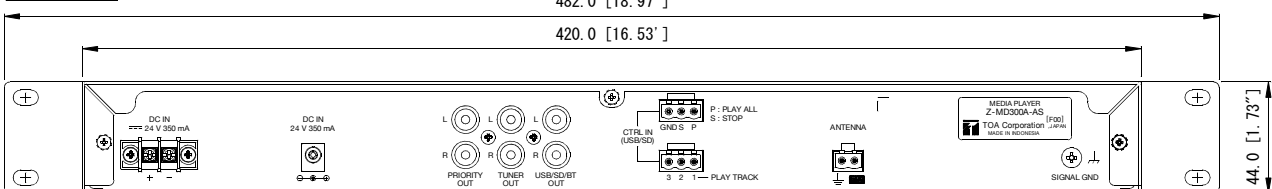

Side View

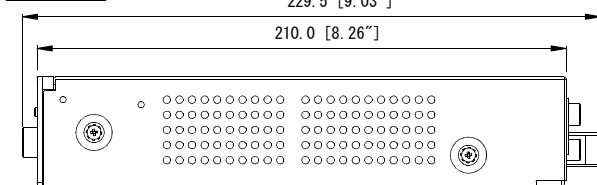

Remote Control View

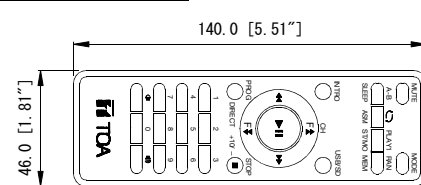

UNIT:mm SCALE:1/3