

DESCRIPTION



The ZM-9002 is a remote control switch/volume panel used with the 9000 series amplifiers. It adds 4 amplifier control inputs and 1 remote volume control, and can be mounted in an American Standard 1-gang electrical box in the wall.

SPECIFICATIONS

Applicable Cable	Single conductor shielded cable
Line Resistance	50 Ω or less (per line)
Terminal	M3 screw terminal, distance between barriers: 7.62 mm
Operating Temperature	-10°C to +40°C
Finish	Surface-treated steel plate, white, paint
Dimensions	72 (W) × 127 (H) × 56 (D) mm
Weight	170 g
Accessory	Box mounting screw (No.6-32UNC × 30) ...2, Box mounting screw (M4 × 30) ...2, Panel mounting screw ...2

Note: Since no electrical box is supplied with the unit, prepare it separately.

APPEARANCE

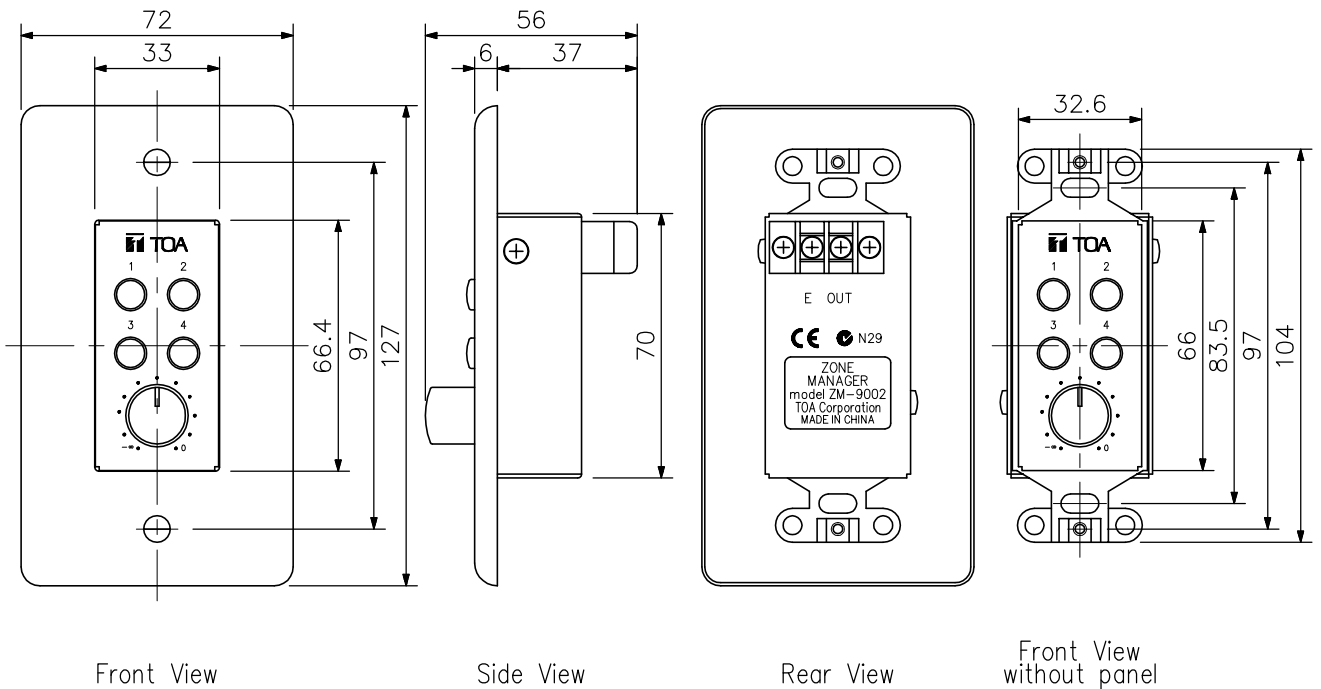

Bottom View

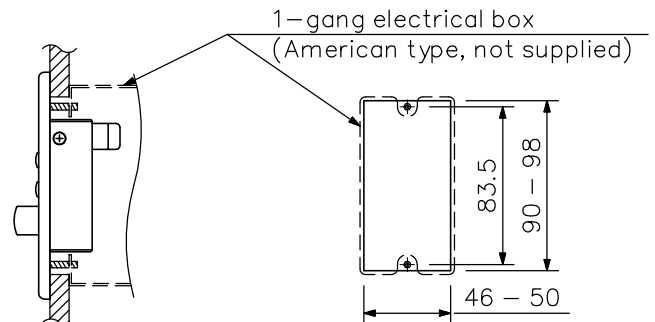


Figure when mounted

Dimensions of mounting opening

If the opening is too small or too large, the ZM-9002 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.

UNIT:mm SCALE:1/2